

10-10-08

A

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

\*EXPRESS MAIL MAILING LABEL NUMBER EL54791932045

DATE OF DEPOSIT 10/6/2000

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 C.F.R. 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE COMMISSIONER OF PATENTS AND TRADEMARKS, WASHINGTON, D.C. 20031

ERIC LINK

(TYPED OR PRINTED NAME OF PERSON MAILING PAPER OR FEE)

Eric Link  
(SIGNATURE OF PERSON MAILING PAPER OR FEE)

Case No. 64908

10/06/00

10921 S. PTO  
ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, DC 20231

Submitted herewith for filing is the patent application of:

Inventors: **Frederick Browne GREGG**  
**Leslie G. BROMWELL**

For: **BACKERBOARD SHEET INCLUDING AERATED CONCRETE CORE**

**Enclosed are:**

- ☒ Patent Application: 34 pages, 53 claims.
- ☒ 10 sheets of drawings.
- ☒ An assignment of the invention to **CONSOLIDATED MINERALS, INC.**
- ☒ A declaration and power of attorney.
- ☒ A verified statement to establish small entity status under 37 CFR §§1.19 and 1.27.
- ☒ Citation Under 37 CFR 1.97 and PTO-1449.

The filing fee has been calculated as shown below:

FOR:	(Col. 1)		(Col. 2)		SMALL ENTITY		LARGE ENTITY	
	# FILED		# EXTRA		RATE	FEE	RATE	FEE
BASIC FEE						\$ 355	OR	\$ 690
TOTAL CLAIMS	53	-20	33	X 9	\$ 297	OR	X 18	\$
INDEP CLAIMS	4	-3	1	X 39	\$ 39	OR	X 78	\$
[ ] MULTIPLE DEPENDENT CLAIM PRESENTED					+	\$	OR	
* If the difference in Col. 1 is less than "0", enter "0" in Col. 2.					TOTAL	\$ 691	TOTAL	\$ ***

- ☒ Enclosed is a check in the amount of \$ 691.00 to cover:  
☒ Filing Fee
- ☒ Enclosed is a check in the amount of \$ 40.00 to cover:  
☒ Recording Assignment
- ☒ The Commissioner is authorized to charge or credit any discrepancies in fee amounts to Deposit Account No. 01-0484.

October 6, 2000  
Date

Paul J. Dittmyer  
PAUL J. DITMYER  
Reg. No. 40,455  
ALLEN, DYER, DOPPELT, MILBRATH & GILCHRIST, P.A.  
255 South Orange Avenue - Suite 1401  
P. O. Box 3791  
Orlando, Florida 32802-3791  
PHONE: (407) 841-2330

Allen, Dyer, Doppelt, Milbrath & Gilchrist, P.A.  
Attorneys-At-Law, 255 S. Orange Avenue, Suite 1401, P.O. Box 3791, Orlando, Florida 32802-3791

10916 U.S. PTO  
09/680721  
10/06/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant or Patentee: **Frederick Browne GREGG**  
Serial or Patent No.: **Not Yet Assigned**  
Attorney's Docket No.: **64908**  
Filed or Issued: **Herewith**  
For: **BACKERBOARD SHEET INCLUDING AERATED CONCRETE CORE**

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY  
STATUS (37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled: **BACKERBOARD SHEET INCLUDING AERATED CONCRETE CORE** described in:

(X) the specification filed herewith  
( ) application serial no. \_\_\_\_\_ filed \_\_\_\_\_  
( ) patent no. \_\_\_\_\_ issued \_\_\_\_\_

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern, or organization to which I have assigned, granted, conveyed or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

( ) no such person, concern, or organization  
(X) persons, concerns or organizations listed below\*

\*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME CONSOLIDATED MINERALS, INC.

ADDRESS P.O. BOX 490300, Leesburg, Florida 34749-0300

( ) INDIVIDUAL (X) SMALL BUSINESS CONCERN ( ) NONPROFIT ORGANIZATION


I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

096807-1-100600

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Frederick Browne GREGG

NAME OF INVENTOR

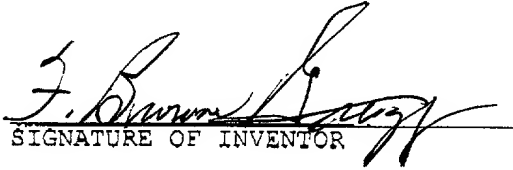  
SIGNATURE OF INVENTOR10/6/2000

DATE

009001-100500

BACKERBOARD SHEET INCLUDING  
AERATED CONCRETE CORE

Related Application

The present application is based upon U.S.  
provisional patent application serial no. 60/158,172  
filed October 6, 1999, the entire disclosure of which  
5 is incorporated herein by reference.

Field of the Invention

The present invention relates to the field of  
construction products, and, more particularly, to a  
lightweight, high-strength, fire-resistant, and  
10 moisture-resistant backerboard sheet as may be used in  
areas subject to moisture and splashing and as may used  
as a backing substrate for tile.

Background of the Invention

Wallboard sheets are widely used in building  
15 construction to form partitions or walls of rooms,  
elevator shafts, stair wells, ceilings, etc. The  
sheets are typically fastened to a suitable supporting  
framework. The seams between sheets are covered to  
provide an even wall surface. The sheets may be  
20 readily cut to size by first scoring the face sheet,  
and then snapping the board about the score line. The  
wall may then be painted or covered with a decorative

wall covering, if desired. Such wallboard sheets created from a gypsum core with outer face layers of paper, sometimes referred to as gypsum board or drywall, are well known.

5                   Gypsum wallboard is typically manufactured by  
delivering a slurry or paste containing crushed gypsum  
rock onto a moving sheet of facing paper to which a  
second or top paper layer is then added to form a long  
board line. The board line permits the slurry to  
10                   harden before being cut. The cut panels are heated in  
a kiln, before being packaged for storage and shipping.

Typically, such sheets are 1/2 or 5/8 inch thick and in conventional sizes of 4 X 8 feet, such a gypsum wallboard sheet may weigh about 55-70 pounds. Accordingly, handling of such gypsum wallboards presents a significant task for construction personnel or wallboard "hangers", particularly when such boards are secured overhead to form a ceiling. In addition, the fire resistance, thermal insulation and sound absorbing properties of conventional gypsum wallboard sheets may not be sufficient for some applications.

Another variation of gypsum wallboard is water-resistant drywall or "greenboard". The greenboard typically includes the same gypsum core, but includes a water-resistant facing so the water is less likely to penetrate, stain and/or decay the wall. Greenboard is typically used for walls in a moist or humid environment, such as a bathroom, for example. Such greenboard is not typically recommended as an underlayment for tile in the bathroom, for example, since water may penetrate the grout or cracks between adjacent tiles and deteriorate the greenboard. U.S. Patent No. 5,552,187 to Green et al. discloses the addition of a fibrous mat-faced gypsum board coated

with a water-resistant resinous coating for greater durability in moist environments.

Yet another related conventional wallboard product to serve as an underlayment for wet areas is the concrete backerboard. For example, UTIL-A-CRETE® Backerboard from Bonsal is a precast cementitious backboard with glass mesh reinforcement. The board includes portland cement, fiber glass mesh and lightweight aggregate. The backerboard is more adapted to be used in areas subject to splashing or high moisture.

While the glass mesh face layers are typically secured to the surface of the backerboard after the core has been precast, continuous production is also disclosed in U.S. Patent No. 5,221,386 to Ensminger et al. In addition, the mesh or reinforcing layers have also been embedded in the faces and edges of the backerboards.

Unfortunately, conventional cementitious backerboards may be more difficult to score and break to size. Moreover, since the backerboards include a core of cement, their density is considerably greater than even conventional gypsym wallboard. Accordingly, manufacturers may offer the backerboards in smaller sizes to be more readily handled by the installer, but such increases seams between sheets and also increases costs of installation. A typically-sized 4 foot by 8 foot sheet can weigh well over 100 pounds, which is very unwieldy especially in confined spaces.

30

#### **Summary of the Invention**

In view of the foregoing background, it is therefore an object of the invention to provide a backerboard sheet for moist areas which is relatively

0960721-100000

lightweight, strong, has good fire resistance, thermal insulation, and sound absorbing properties.

This and other objects, features and advantages in accordance with the invention are  
5 provided by a backerboard sheet comprising a core having opposing first and second major surfaces, at least one moisture-resistant face layer on at least one of the first and second major surfaces of the core; and wherein the core comprises aerated concrete. The  
10 provision of aerated concrete for the core provides many key advantages over conventional backerboard sheets, such as gypsum greenboard or cementitious backerboard, for example.

The at least one moisture-resistant face  
15 layer may comprise fibers, such as arranged in a woven mesh. The fibers may include at least one of glass, plastic, and metal. In addition, the at least one moisture-resistant face layer may further comprise a moisture-resistant material incorporating the fibers,  
20 such as a suitable resin, for example.

The at least one moisture-resistant face layer may comprise first and second moisture-resistant face layers on respective first and second major surfaces of the core. The core may also have a  
25 generally rectangular shape defining a pair of opposing side edges and a pair of opposing end edges. The first major surface in some embodiments may have beveled portions adjacent respective opposing side edges.

The at least one moisture-resistant face  
30 layer may extend around the opposing side edges, and leaving the opposing end edges of the core exposed.

The aerated concrete core may have a relatively low density in a range of about 25 to 40 lbs./ft.<sup>3</sup> The core may also have a thickness in a  
35 range of about 1/4 to 1 inch, a width in a range of

00900721-100600

about three to five feet, and a length in a range of about five to sixteen feet. Accordingly, even a 1 inch thick, 4 foot by 8 foot backerboard sheet may have a relatively low total weight of about 60 pounds.

5           The core may further comprise reinforcing fibers in the aerated concrete. For example, the reinforcing fibers comprise cellulose, and/or glass.

          The backerboard sheet is readily manufactured, and may include a joint therein as a  
10   result of the manufacturing process. The joint can be stronger than the adjacent core material, and without compromising the ability to score and snap break the sheet as conveniently as with conventional backerboard sheets. In other words, some embodiments of the sheet  
15   may include first and second portions aligned in end-to-end relation at respective opposing edges thereof, and an adhesive layer joining the opposing edges of the first and second portions together.

#### **Brief Description of the Drawings**

FIG. 1 is a schematic view of a portion of a wall structure including the wallboard and/or backerboard in accordance with the present invention with various layers removed for clarity of explanation.

FIG. 2 is a perspective view of a wallboard sheet as can be used in the wall structure of FIG. 1.

FIG. 3 is an enlarged cross-sectional view through a side edge of the wallboard sheet as shown in FIG. 2.

FIG. 4 is a perspective view of another embodiment of a wallboard sheet as can be used in the wall structure of FIG. 1.

FIG. 5 is an enlarged cross-sectional view through a beveled portion of the wallboard sheet as shown in FIG. 4.

09680721-100600



FIG. 6 is a perspective view of a backerboard sheet as can be used in the wall structure of FIG. 1.

FIG. 7 is an enlarged cross-sectional view through a side edge of the backerboard sheet as shown in FIG. 6.

FIG. 8 is a perspective view of another embodiment of a backerboard sheet as can be used in the wall structure of FIG. 1.

FIG. 9 is an enlarged cross-sectional view through a beveled portion of the backerboard sheet as shown in FIG. 8.

FIG. 10 is a flowchart for a first embodiment of a method for making wallboard and/or backerboard sheets in accordance with the invention.

FIG. 11 is a flowchart for a second embodiment of a method for making wallboard and/or backerboard sheets in accordance with the invention.

FIG. 12 is a flowchart for a third embodiment of a method for making wallboard and/or backerboard sheets in accordance with the invention.

FIG. 13 is a flowchart for a fourth embodiment of a method for making wallboard and/or backerboard sheets in accordance with the invention.

FIG. 14 is a schematic block diagram of a system for making wallboard and/or backerboard sheets in accordance with the invention.

FIG. 15 is a more detailed schematic diagram of a former embodiment for the system as shown in FIG. 14.

FIG. 16 is a more detailed schematic diagram of an alternative portion of the former embodiment as shown in FIG. 15.

FIG. 17 is a more detailed schematic of another former embodiment and variation thereof for the system of FIG. 14.

FIG. 18 is a more detailed schematic of still another former embodiment and variation thereof for the system of FIG. 14.

### **Detailed Description of the Preferred Embodiments**

The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout, and prime and multiple prime notation are used in alternate embodiments to indicate similar elements.

The present invention is based, at least in part, upon the recognition of the various shortcomings of prior art gypsum wallboard and/or cementitious backerboard sheets, and the further recognition that the use of aerated concrete as the core material overcomes a number of the shortcomings. As it is also known autoclaved aerated concrete is a high-quality, load-bearing, as well as insulating building material produced in a wide range of product sizes and strengths. The material has been used successfully in Europe and is now among widely used wall building materials in Europe with increasing market shares in other countries.

Aerated concrete is a steam cured mixture of sand or pulverized fuel ash, cement, lime and an aeration agent. High pressure steam curing in an

00900721 100600

autoclave produces a physically and chemically stable product with an average density being about one fifth that of normal concrete. The material includes non-connecting air cells, and this gives aerated concrete some of its unique and advantageous properties. Aerated concrete enjoys good strength, low weight, good thermal insulation properties, good sound deadening properties, and has a high resistance to fire.

Aerated concrete may be used in the form of panels or individual building blocks. It has been used for residences; commercial, industrial and agricultural buildings; schools; hospitals; etc. and is a good material in most all climates. Panels or blocks may be joined together using common mortar or thin set glue mortar or adhesive. Aerated concrete has durability similar to conventional concrete or stone and a workability perhaps better than wood. The material can be cut or sawn and readily receives expandable fasteners. Aerated concrete has a thermal conductivity six to ten times better than conventional concrete. The material is also non-rotting, non-toxic and resistant to termites.

As disclosed in U.S. Patent No. 4,902,211 to Svanholm, for example, aerated concrete may typically be produced as follows. One or several silica containing materials, such as sand, shale ashes or similar materials, as well as one or more calcareous binders, such as lime and/or cement, are mixed with a rising or aeration agent. The aeration agent typically includes aluminum powder which reacts with water to develop hydrogen gas at the same time a mass of what can be considered a calcium silicate hydrate forms. The development of hydrogen gas gives the mass macroporosity. The rising mass is typically contained within a mold. After rising, the mass is permitted to

09680721-100600

stiffen in the mold forming a semiplastic body which has low strength, but which will keep together after removal from the mold.

After a desired degree of stiffness is achieved and the body is removed from the mold, the body may typically be divided or cut by wires into separate elements having the desired shape, such as building blocks or larger building panels. The divided body is positioned in an autoclave where it is steam cured at high pressure and high temperature to obtain suitable strength. The body is then advanced to a separation station where the adjacent building blocks or panels are separated from one another. The blocks are packaged, such as onto pallets for storage and transportation.

Referring now initially to FIGS. 1-5 a wallboard sheet **30** in accordance with the present invention is now described. The wallboard sheet **30** may be used to form part or all of an interior wall structure, such as the right hand portion of the wall structure **25** (FIG. 1). Of course, the wallboard sheet **30** could be used for ceilings, interior partitions, elevator shafts, etc, as will be appreciated by those skilled in the art. The wall structure **25** will typically include a frame **26** formed of horizontal and vertical wall studs or members, **27**, **28**, respectively, to which the wallboard sheets **30** are secured by suitable fasteners and/or adhesive.

The wallboard sheet **30** includes a core **40** having opposing first and second major surfaces **40a**, **40b**, respectively, and at least one face layer on at least one of the first and second major surfaces of the core. The core **40** includes aerated concrete. The provision of aerated concrete for the core provides

00600721 100600

many key advantages over conventional wallboard sheets, such as gypsum wallboard, for example. The core **40** may be produced from a mixture of Portland cement, quick lime, sand, aluminum powder and water, although at least some of the sand and perhaps some of the quick lime can be replaced by flyash. In general, the flyash may be used as at least a partial replacement for sand in the mix, but flyash, depending on its composition, may react with the aluminum powder in a manner similar to quick lime to produce the micro-cellular bubbles in the expanded aerated concrete.

In the first embodiment of the wallboard sheet **30**, both first and second face layers **42a**, **42b**, respectively, are adhesively secured to the opposing first and second major surfaces **40a**, **40b** of the core **40** via respective adhesive layers **43a**, **43b**. In other embodiments, the adhesive may be incorporated into the face layers and/or the surface portion of the aerated concrete core as will be appreciated by those skilled in the art. One or both of the face layers **42a**, **42b** may comprise paper, having colors and/or weights, for example, similar to conventional gypsum wallboard paper.

The core **40** and hence the wallboard sheet **30** may have a generally rectangular shape defining a pair of opposing side edges **31a**, **31b**, respectively, and a pair of opposing end edges **32a**, **32b**, respectively. The first face layer **42a** may extend around the opposing side edges **31a**, **31b** as shown perhaps best in the enlarged cross-sectional view of FIG. 3. In addition, the opposing end edges **32a**, **32b** of the core may be exposed (FIG. 2). If desired, a tape, not shown, may be provided on the opposing ends **32a**, **32b** as will be appreciated by those skilled in the art.

09680721 100600

The aerated concrete core **40** may have a relatively low density in a range of about 25 to 40 lbs./ft.<sup>3</sup> The core **40** and hence the sheet **30**, as well, may also have a thickness **T** in a range of about 1/4 to 1 inch, a width **W** in a range of about three to five feet, and a length **L** in a range of about five to sixteen feet. Accordingly, even a 1 inch thick, 4 foot by 8 foot wallboard sheet **30** may have a relatively low total weight of about 60 pounds.

Referring now more particularly to the embodiment of the wallboard sheet **30'** shown in FIGS. 4 and 5, other aspects of the invention are now explained. The illustrated wallboard sheet **30'** includes beveled portions **35a**, **35b** formed on the first major surface **40a'** of the core **40'** adjacent respective opposing side edges **31a'**, **31b'**. The beveled portions **35a**, **35b** may facilitate the receipt of taping and joint compound to cover the joints between adjacent sheets **30'** in the finished wall structure.

As perhaps best shown in FIG. 5, the illustrated embodiment of the wallboard sheet **30'** also includes only a single face layer **42a'**, although in other embodiments, a second face layer may be applied as well. In addition, the illustrated embodiment of the core **40'** includes schematically illustrated reinforcing fibers **46**. The fibers **46** may be provided by a fibrous material, such as cellulose or other natural or synthetic fibers, including fiberglass, metal or other materials, to impart strength to the core and reduce the relative brittleness of the aerated concrete.

Another aspect of the wallboard sheet **30'** is that it includes a joint schematically illustrated by the dashed line **37** extending across the width of the

09630721-100600

sheet as may be formed during the manufacturing thereof and as will be explained in greater detail herein. The joint **37** can be stronger than the adjacent core material, and without compromising the ability to score and snap break the wallboard sheet **30'** as conveniently as with conventional gypsum wallboard. Stated slightly differently, some embodiments of the wallboard sheet **30'** may include first and second portions on opposite sides of the joint **37** aligned in end-to-end relation at respective opposing edges thereof, and an adhesive layer may be used to join the opposing edges of the first and second portions together.

The other elements of the wallboard sheet **30'** indicated with prime notation and not specifically mentioned are similar to those elements described above with reference to the wallboard sheet **30** described above. Accordingly, these elements need no further discussion herein. Those of skill in the art will also appreciate that the various features of the embodiments of the wallboard sheets **30, 30'** can be mixed and/or substituted in yet further embodiments of the invention.

Because of the relative light weight of the wallboard sheets **30, 30'** including aerated concrete, shipping, handling, and installation at a job site are facilitated. In addition, the substitution of aerated concrete for gypsum, for example, also offers the advantages of increased fire resistance, thermal insulation, sound deadening, and other properties in a wall structure formed by fastening the aerated concrete wallboard sheets to a suitable building frame.

Returning again briefly to FIG. 1 and additionally to FIGS. 6-9, a backerboard sheet **60** in accordance with the present invention is now described.

009007-100600

Conventional gypsum greenboard or cementitious sheets for such high-moisture applications suffer a number of significant shortcomings and disadvantages as highlighted in the background of the invention section above. The backerboard sheet **60** including a core **70** comprising aerated concrete, and at least one moisture-resistant face layer overcomes these shortcomings and disadvantages.

In the first illustrated embodiment of the backerboard sheet **60**, both first and second moisture-resistant face layers **72a**, **72b**, respectively, are secured to the opposing first and second major surfaces **70a**, **70b** of the core **70**. Each moisture-resistant face layer **72a**, **72b** illustratively includes a woven fiber mesh **74a**, **74b** incorporated into a respective resin layer **73a**, **73b**. The fibers may include at least one of glass, plastic, and metal. The moisture-resistant face layer may have other constructions and be formed of different moisture-resistant materials, such as those commonly used for cementitious backerboard, and others as will be appreciated by those skilled in the art.



For example, moisture resistant face layers include nylon, aramid resin, or metal fibers as disclosed in U.S. Patent No. 5,221,386 may also be used, and the entire contents of this patent are incorporated herein by reference.

The core **70** and hence the backerboard sheet **60** may also have a generally rectangular shape defining a pair of opposing side edges **61a**, **61b**, respectively, and a pair of opposing end edges **62a**, **62b**, respectively. The first face layer **72a** may also extend around the opposing side edges **61a**, **61b** as shown perhaps best in the enlarged cross-sectional view of FIG. 7. In addition, the opposing end edges **72a**, **72b** of the core may be exposed (FIG. 6). If desired, a tape, not shown, may be provided on the opposing ends **62a**, **62b** as will be appreciated by those skilled in the art. In addition, the aerated concrete core **70** may have the same characteristics and sizes as mentioned above with respect to the wallboard sheets **30**, **30'**, for example.

Referring now more particularly to the embodiment of the backerboard sheet **60'** shown in FIGS. 8 and 9, other aspects of the invention are now explained. The illustrated backerboard sheet **60'** includes beveled portions **65a**, **65b** formed on the first major surface **70a'** of the core **70'** adjacent respective opposing side edges **61a'**, **61b'**. The beveled portions **65a**, **65b** may facilitate the receipt of taping and sealing or joint compound to cover the joints between adjacent sheets **60'** in the finished wall structure.

As perhaps best shown in FIG. 9, the illustrated embodiment of the backerboard sheet **60'** also includes only a single moisture-resistant face layer **72a'**, although in other embodiments, a second

0099007" T2428960

face layer may be applied as well. The moisture-resistant face layer **72a'** is also illustratively directly secured to the core **70**, although an incorporated resin or adhesive may be used in other embodiments.

The illustrated embodiment of the core **70'** includes schematically illustrated reinforcing fibers **76**. The fibers **76** may be provided by a fibrous material, such as cellulose or other natural or synthetic fibers, including fiberglass, metal or other materials, to impart strength to the core and reduce the relative brittleness of the aerated concrete. The fibers may also be desirably selected to avoid attracting or retaining moisture.

Another aspect of the backerboard **60'**, similar to the wallboard **30'** discussed above, is that it includes a joint schematically illustrated by the dashed line **67** extending across the width of the sheet as may be formed during the manufacturing thereof and as will be explained in greater detail herein. The joint **67** can also be stronger than the adjacent core material, and without compromising the ability to score and snap break the backerboard sheet **60'**. In other words, the backerboard sheet **60'** may include first and second portions on opposite sides of the joint **67** aligned in end-to-end relation at respective opposing edges thereof, and an adhesive layer may be used to join the opposing edges of the first and second portions together.

The other elements of the backerboard sheet **60'** indicated with prime notation and not specifically mentioned are similar to those elements described above with reference to the backerboard sheet **60** described above. Accordingly, these elements need no further

00000721 100600

discussion herein. Those of skill in the art will also appreciate that the various features of the embodiments of the wallboard sheets **60, 60'** can be mixed and/or substituted in yet further embodiments of the invention. Because of the relative light weight of the backerboard sheets **60, 60'** including aerated concrete, shipping, handling, and installation at a job site are facilitated.

Turning now additionally to the flowcharts of FIGS. 10-13 various method aspects for making the wallboard and/or backerboard sheets in accordance with the invention are now described. The method may include forming core material having opposing first and second major surfaces and comprising aerated concrete, securing at least one face layer on at least one of the first and second major surfaces of the core material, and cutting the core material and at least one face layer secured thereto into a plurality of wallboard or backerboard sheets. The provision of aerated concrete for the core provides many key advantages over conventional gypsum wallboard sheets, and/or conventional backerboard sheets, such as gypsum greenboard or cementitious backerboard, for example.

In one class of embodiments, the method may further comprise curing the core material prior to securing the at least one face layer thereto. In another class, the method may further comprise curing the core material after securing the at least one face layer thereto.

Referring now to the flowchart of FIG. 10, a particularly advantageous embodiment is described wherein curing is performed before adding the at least one face layer. In particular, from the start (Block **100**), the materials for making aerated concrete are mixed and dispensed into a suitable mold at Block **102**.

09660721-100600

In other words, in this embodiment forming the core material comprises dispensing materials for making aerated concrete into a mold and allowing the materials to rise and stiffen into a body, curing the body, and dividing the cured body into a plurality of cured sheets to serve as the core material. The plurality of the cured sheets may be joined together in end-to-end relation while advancing the cured sheets along a path of travel. In addition, securing the at least one face layer may be performed while the cured sheets are advanced along the path of travel.

A variation of this method embodiment is now explained with reference to the flowchart of FIG. 11. In this embodiment, prime notation is used to indicated similar steps which need no further explanation. In accordance with the illustrated embodiment of FIG. 11, the body is divided, but not separated or cut, into sheets at Block **105**, and is then cured at Block **107**. Thereafter, the cured sheets are used as the core material and to which the face layer(s) are secured as

described above. This embodiment may offer the advantage of slightly easier cutting of the body, since it has not been fully cured; however, the ultimate dimensional accuracy of the sheets may be less compared to first curing the body and then cutting the body into cured sheets. Of course, a combination of some cutting or shaping before curing and further cutting or shaping after curing are also contemplated by the present invention.

Referring now more particularly to the flow charts of FIGS. 12 and 13, the second class of method embodiments, wherein the one or more face layers are added before final curing, are now described. It is noted that final curing using a conventional autoclave may place relatively difficult requirements on the characteristics of the face layers in terms of temperature resistance and/or abrasion resistance. Accordingly, manufacturing speed or efficiency may need to be considered in view of the increased face layer material costs as will be appreciated by those skilled in the art.

The first embodiment is now described with reference to the flowchart of FIG. 12. From the start (Block **130**), the materials for making aerated concrete are mixed and dispensed into a suitable mold at Block **132**. The materials are permitted to rise and stiffen into a body (Block **134**), and the body may then be removed from the mold and divided into uncured sheets (Block **136**). The one or more face layers may be secured to the uncured sheets at Block **138**, which can then be cured (Block **140**), before being cut into desired lengths at Block **142**. The final sheets may be packaged and shipped at Block **144** before stopping or ending the method at Block **146**. Of course, the final

009607-100600

Of course, in all of the specifically described and contemplated method embodiments, the securing of the at least one face layer may comprise securing first and second face layers on respective first and second major surfaces of the core material. The at least one face layer may comprise paper, such as

for a wallboard. Alternately, the at least one face layer may be moisture-resistant for a backerboard. Forming may also include forming the first major surface of the core material to have beveled portions adjacent respective opposing longitudinal side edges. In addition, the at least one face layer may be secured to extend around the opposing longitudinal side edges by the use of simple edge wrapping guides, for example. The core material may also be formed with reinforcing fibers in the aerated concrete.

Turning now additionally to FIGS. 14-18 various aspects of a system for making the wallboard and/or backerboard including aerated concrete in accordance with the invention are now described. Starting with the overall simplified schematic diagram of FIG. 14 an illustrated embodiment of the system **200** is now described. The system **200** includes a mixer **210** for mixing materials for making aerated concrete. The mixer **210** is supplied with the starting materials for making aerated concrete from the cement supply **201**, the sand (ash) supply **202**, the water supply **203**, the aluminum or other aeration agent supply **204**, the lime supply **205**, and the optional reinforcing fiber supply **206**. The system also illustratively includes at least one face layer supply **215**, a former **220** downstream from the mixer **210** and connected to the face layer supply **215**. A cutter **225** is provided downstream from the former **220**. And an optional packager **230** is provided, such as to package the wallboard or backerboard sheets onto pallets for shipping, for example.

The former **220** is for forming core material having opposing first and second major surfaces and comprising aerated concrete, and for securing at least one face layer from the at least one face layer supply

**215** onto at least one of the first and second major surfaces of the core material. As described below, in one class of embodiments, the former **220** may further include an autoclave for curing the core material prior to securing the at least one face layer thereto. In another class, the former may further include an autoclave or other curing apparatus for curing the core material after securing the at least one face layer thereto.

One particularly advantageous embodiment of the system will now be explained with reference to the more detailed schematic diagram of the former **220** as shown in FIG. 15. More particularly, the illustrated embodiment of the former **220** may include a mold **240** downstream from the mixer for receiving the materials for making aerated concrete therein and allowing the materials to rise and stiffen into a body **242**. The former **220** also includes the autoclave **243** downstream from the mold **240** for curing the body **242**. Of course, the system would also include the necessary material handling mechanisms and apparatus to remove the body **242** and position it as will be appreciated by those skilled in the art.

The former **220** also includes a divider downstream from the autoclave for dividing the cured body **242** into a plurality of cured sheets to serve as the core material. One or more band saws **245**, for example, could be used to slice the cured body **242** into a plurality of cured sheets **244**. Other types of saws could also be used.

The former **220** may also include a conveyor **247** and a sheet handler **246** cooperating therewith for joining a plurality of the cured sheets **244** together in end-to-end relation while advancing the cured sheets

00680721.100600



along a path of travel on the conveyor. Alternatively, the cured sheets **244** may not be joined together, but may have already been cut in desired dimensions. The schematically illustrated end-to-end joiner **250** can provide the adhesive, alignment and compressive forces, if needed to insure a quality joint. Downstream from the joiner **250**, a trim/bevel station **252** can be used to trim the upper and/or side surfaces of the sheets, and also to form the desired beveled sides if desired.

Both the joiner **250** and trim/bevel station **252** can be readily made from conventional equipment and need no further discussion herein. What is noted, however, is that the aerated concrete is readily workable unlike conventional concrete, for example. A waste collection system may also be provided to collect and recycle trimmed or cut material from the aerated concrete as will be appreciated by those skilled in the art.

Downstream from the trim/bevel station **252**, the former **220** also illustratively includes a securing station **253** to apply the one or more face layers from the appropriate supplies **254**, **255**. This securing station **253** can use conventional layer handling, guiding rolls, etc. to attach the at least one face layer while the cured sheets **244** are advanced along the path of travel. The securing station **253** can also include the necessary guides and rolls to roll a face layer around the longitudinal side edges as described above.

Turning now briefly to FIG. 16 a variation of the former embodiment described above will now be described. In this embodiment of the former **220'**, the body **242'** is cut or divided into sheets **244'** before positioning in the autoclave **243'**. As discussed above,

0099071 100600

while the cutting may be somewhat easier, and a more simple wire saw **249'** may be used, the resulting dimensions of the sheets may not be as accurate. This embodiment does, however, avoid the need for higher temperature compatible/resistant face layers. Of course, combinations of pre-cure and post-cure shaping of the core material may also be used.

Turning now more particularly to FIG. 17 another variation or embodiment of a former **220"** is now described. In this embodiment, the face layers from the supplies **254"**, **255"** are added downstream from dividing the body **242"** into uncured sheets **244"** but before positioning in the autoclave **243"** for curing. As noted above this may increase the requirements and costs for the face layers, but may provide increased manufacturing efficiencies as will be appreciated by those skilled in the art. As shown, uncured sheets **244"** may also be passed through cutter **225"** prior to the autoclave **243"**. Of course, the various core shaping operations may also be performed on the uncured sheets to form beveled edges, etc.

A further embodiment of the former **220'"** is described with reference to FIG. 18. This embodiment of the system may provide for near continuous production. In this embodiment, the former **220'"** may comprise a slurry dispenser (and spreader) **260** and a conveyor **247'"** cooperating therewith for dispensing the materials for making aerated concrete adjacent at least one face layer, such as from supply **254'"**, as the at least one face layer is advanced along a path of travel. The securing station **253'"** secures the second face layer from the supply **255'"** and may wrap the edges in the illustrated embodiment. Again, the slurry may also be dispensed directly onto a surface, such as a

00960721-100600

stainless steel surface, instead of onto the at least one face layer, with the first and second face layers being secured by the securing station **253''** thereafter. In this embodiment, the autoclave or other curing station **243''** is downstream from the dispenser for curing the materials for making aerated concrete. The autoclave **243''** may preferably be after the cutter **225''**, for example, but the autoclave or other curing device may be positioned along the conveyor **247''**. Typically, curing takes between 4 and 12 hours at a temperature of about 165°C and pressure of about 150 psi. It is expected that the time from pouring the mixture onto the conveyor to cutting the sheet into final lengths will vary between 20 and 50 minutes depending on the relative percentage of cement, lime and aluminum.

In any of the embodiments, the former may secure first and second face layers on respective first and second major surfaces of the core material. For wallboard sheets, the at least one face layer supply may comprise at least one paper face layer supply. For backerboard sheets, the at least one face layer supply preferably comprises at least one moisture-resistant face layer supply.

Other related concepts and features are disclosed in the following copending patent applications filed concurrently herewith and assigned to the assignee of the present invention and are entitled WALLBOARD SHEET INCLUDING AERATED CONCRETE CORE, attorney work docket number 64901; METHOD FOR MAKING WALLBOARD OR BACKERBOARD SHEETS INCLUDING AERATED CONCRETE, attorney work docket number 64906 and SYSTEM FOR MAKING WALLBOARD OR BACKERBOARD SHEETS INCLUDING AERATED CONCRETE, attorney work docket number

09680721 100600

64907, the entire disclosures of which are incorporated herein in their entirety by reference.

It is also contemplated that the wallboard and backerboard sheets described herein may be produced without the face layers if sufficient strength and surface smoothness can be obtained by use of the fibrous filler material alone, for example. However, it is recognized that any filler material will add weight and that the volume of fibrous material is a trade off with weight and strength or flexibility. Thus, it may be desirable to use just enough fibrous material to produce some slight flexibility without addressing surface smoothing. Accordingly, many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed, and that other modifications and embodiments are intended to be included within the scope of the appended claims.

009007 "T22099560

**THAT WHICH IS CLAIMED IS:**

1. A backerboard sheet for moist areas and comprising:

a core having opposing first and second major surfaces;

5           said core comprising aerated concrete; and  
          at least one moisture-resistant face layer on  
at least one of the first and second major surfaces of  
said core.

2. A backerboard sheet according to Claim 1  
wherein said at least one moisture-resistant face layer  
comprises fibers.

3. A backerboard sheet according to Claim 2  
wherein said fibers are arranged in a woven mesh.

4. A backerboard sheet according to Claim 2  
wherein said fibers comprise at least one of glass,  
plastic, and metal.

5. A backerboard sheet according to Claim 2  
wherein said at least one moisture-resistant face layer  
further comprises a moisture-resistant material  
incorporating said fibers.

6. A backerboard sheet according to Claim 1  
wherein said at least one moisture-resistant face layer  
comprises first and second moisture-resistant face  
layers on respective first and second major surfaces of  
5   said core.

7. A backerboard sheet according to Claim 1  
wherein said core has a generally rectangular shape

09660721.100600

defining a pair of opposing side edges and a pair of opposing end edges.

8. A backerboard sheet according to Claim 7 wherein the first major surface has beveled portions adjacent respective opposing side edges.

9. A backerboard sheet according to Claim 7 wherein said at least one moisture-resistant face layer extends around the opposing side edges.

10. A backerboard sheet according to Claim 9 wherein the opposing end edges of said core are exposed.

11. A backerboard sheet according to Claim 1 wherein said core comprises aerated concrete having a density in a range of about 25 to 40 lbs./ft.<sup>3</sup>

12. A backerboard sheet according to Claim 1 wherein said core has a thickness in a range of about 1/4 to 1 inch.

13. A backerboard sheet according to Claim 1 wherein said core further comprises reinforcing fibers in said aerated concrete.

14. A backerboard sheet according to Claim 1 wherein said core has a generally rectangular shape having a width in a range of about three to five feet.

15. A backerboard sheet according to Claim 1 wherein said core has a generally rectangular shape with a length in a range of about five to sixteen feet.

09580721-100600

16. A backerboard sheet according to Claim 1 wherein said core comprises:

first and second portions aligned in end-to-end relation at respective opposing edges thereof; and

5 an adhesive layer joining the opposing edges of said first and second portions together.

17. A backerboard sheet for moist areas and comprising:

a core having opposing first and second major surfaces;

5 said core comprising aerated concrete; and  
at least one moisture-resistant face layer on at least one of the first and second major surfaces of said core, said at least one moisture-resistant face layer comprising a woven fiber mesh.

18. A backerboard sheet according to Claim 17 wherein said woven fiber mesh comprises at least one of glass, plastic, and metal fibers.

19. A backerboard sheet according to Claim 17 wherein said at least one moisture-resistant face layer further comprises a moisture-resistant material incorporating said woven fiber mesh.

20. A backerboard sheet according to Claim 17 wherein said at least one moisture-resistant face layer comprises first and second face moisture-resistant layers on respective first and second major  
5 surfaces of said core.

21. A backerboard sheet according to Claim 17 wherein said core has a generally rectangular shape

009097 12409960

defining a pair of opposing side edges and a pair of opposing end edges.

22. A backerboard sheet according to Claim 21 wherein the first major surface has beveled portions adjacent respective opposing side edges.

23. A backerboard sheet according to Claim 21 wherein said at least one moisture-resistant face layer extends around the opposing side edges.

24. A backerboard sheet according to Claim 21 wherein the opposing end edges of said core are exposed.

25. A backerboard sheet according to Claim 17 wherein said core comprises aerated concrete having a density in a range of about 25 to 40 lbs./ft.<sup>3</sup>

26. A backerboard sheet according to Claim 17 wherein said core has a thickness in a range of about 1/4 to 1 inch.

27. A backerboard sheet according to Claim 17 wherein said core further comprises reinforcing fibers in said aerated concrete.

28. A backerboard sheet according to Claim 17 wherein said core comprises:

first and second portions aligned in end-to-end relation at respective opposing edges thereof; and

5 an adhesive layer joining the opposing edges of said first and second portions together.

09680721-100500



5           said core comprising aerated concrete; and  
first and second moisture-resistant face  
layers on respective first and second major surfaces of  
said core, each of said first and second moisture-  
resistant face layers comprising a woven fiber mesh and  
10 a moisture-resistant material incorporating said woven  
fiber mesh.

31. A backerboard sheet according to Claim 29 wherein said core has a generally rectangular shape defining a pair of opposing side edges and a pair of opposing end edges.

32. A backerboard sheet according to Claim 31 wherein the first major surface has beveled portions adjacent respective opposing side edges.

33. A backerboard sheet according to Claim 31 wherein the first moisture-resistant face layer extends around the opposing side edges.

34. A backerboard sheet according to Claim 31 wherein the opposing end edges of said core are exposed.

5

10

40. A wall structure according to Claim 39 further comprising a plurality of tiles secured to said at least one backerboard sheet.

41. A wall structure according to Claim 39 wherein said at least one moisture-resistant face layer comprises fibers.

42. A wall structure according to Claim 41 wherein said fibers are arranged in a woven mesh.

43. A wall structure according to Claim 41 wherein said fibers comprise at least one of glass, plastic, and metal.

44. A wall structure according to Claim 41 wherein said at least one moisture-resistant face layer further comprises a moisture-resistant material incorporating said fibers.

45. A wall structure according to Claim 39 wherein said at least one moisture-resistant face layer comprises first and second moisture-resistant face layers on respective first and second major surfaces of  
5 said core.

46. A wall structure according to Claim 39 wherein said core has a generally rectangular shape defining a pair of opposing side edges and a pair of opposing end edges.

47. A wall structure according to Claim 46 wherein the first major surface has beveled portions adjacent respective opposing side edges.

48. A wall structure according to Claim 46 wherein said at least one moisture-resistant face layer extends around the opposing side edges.

00900721.100600

49. A wall structure according to Claim 46 wherein the opposing end edges of said core are exposed.

50. A wall structure according to Claim 39 wherein said core comprises aerated concrete having a density in a range of about 25 to 40 lbs./ft.<sup>3</sup>

51. A wall structure according to Claim 39 wherein said core has a thickness in a range of about 1/4 to 1 inch.

52. A wall structure according to Claim 39 wherein said core further comprises reinforcing fibers in said aerated concrete.

53. A wall structure according to Claim 39 wherein said core comprises:

first and second portions aligned in end-to-end relation at respective opposing edges thereof; and

5 an adhesive layer joining the opposing edges of said first and second portions together.

009007 12209950

### Abstract of the Disclosure

A backerboard sheet is for moist areas and includes a core having opposing first and second major surfaces, at least one moisture-resistant face layer on at least one of the first and second major surfaces of the core; and wherein the core comprises aerated concrete. The provision of aerated concrete for the core provides many key advantages over conventional backerboard sheets, such as gypsum greenboard or cementitious backerboard, for example. The at least one moisture-resistant face layer may include fibers, such as arranged in a woven mesh. The fibers may include at least one of glass, plastic, and metal. In addition, the at least one moisture-resistant face layer may further include a moisture-resistant material incorporating the fibers, such as a suitable resin, for example. The at least one moisture-resistant face layer may include first and second moisture-resistant face layers on respective first and second major surfaces of the core. The core may also have a generally rectangular shape defining a pair of opposing side edges and a pair of opposing end edges. The first major surface in some embodiments may have beveled portions adjacent respective opposing side edges.

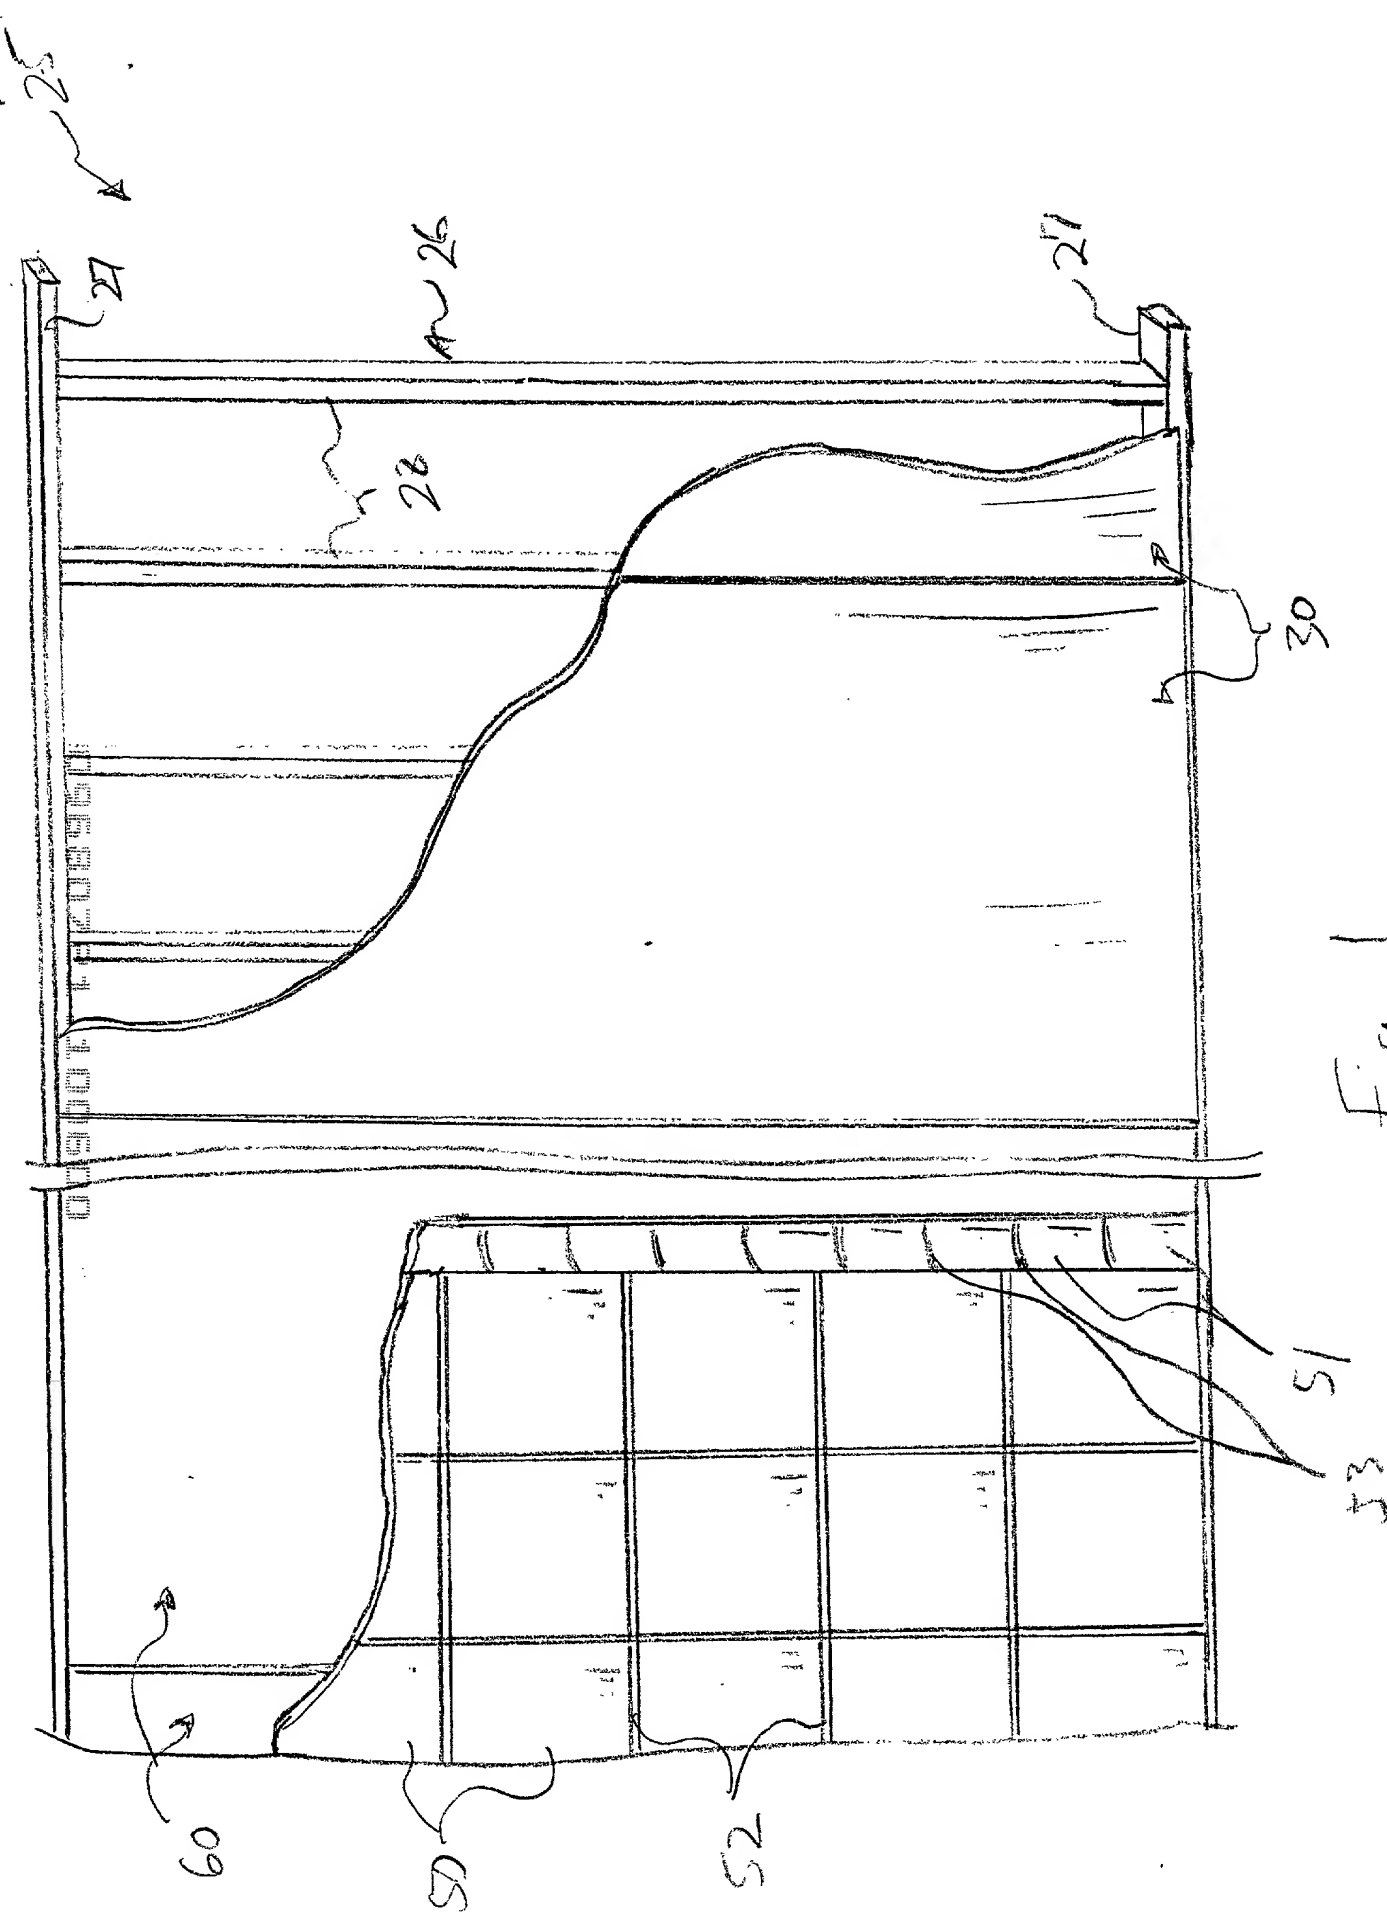
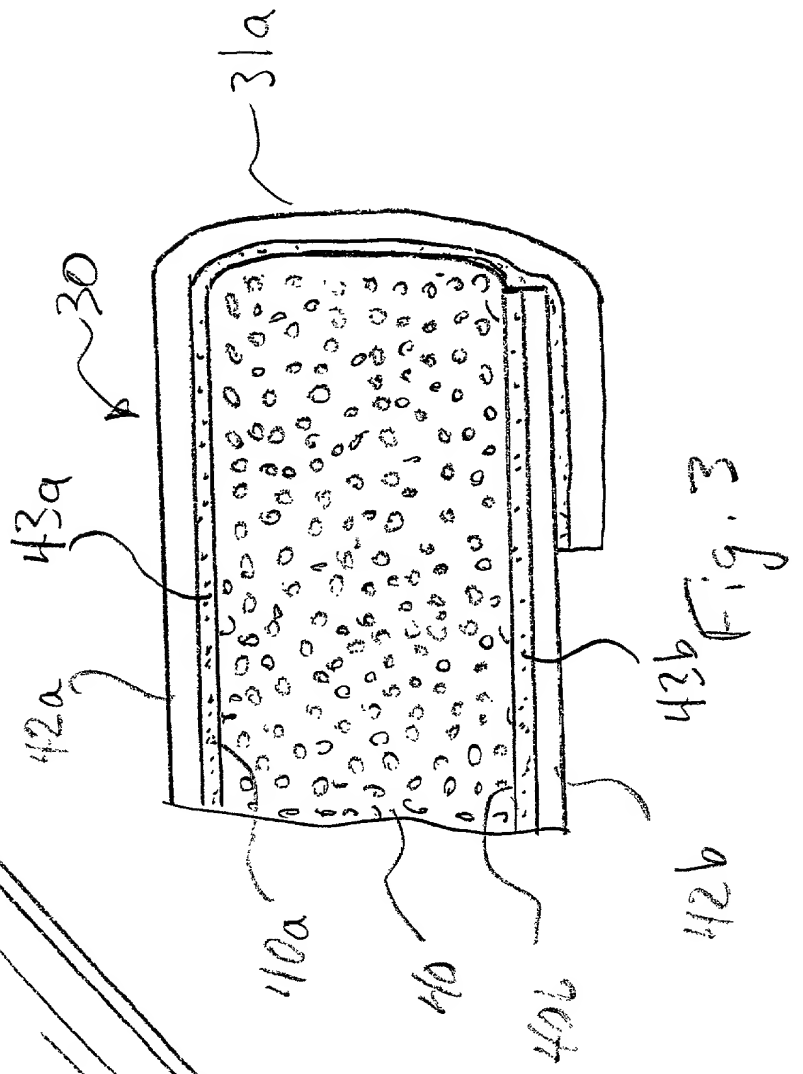
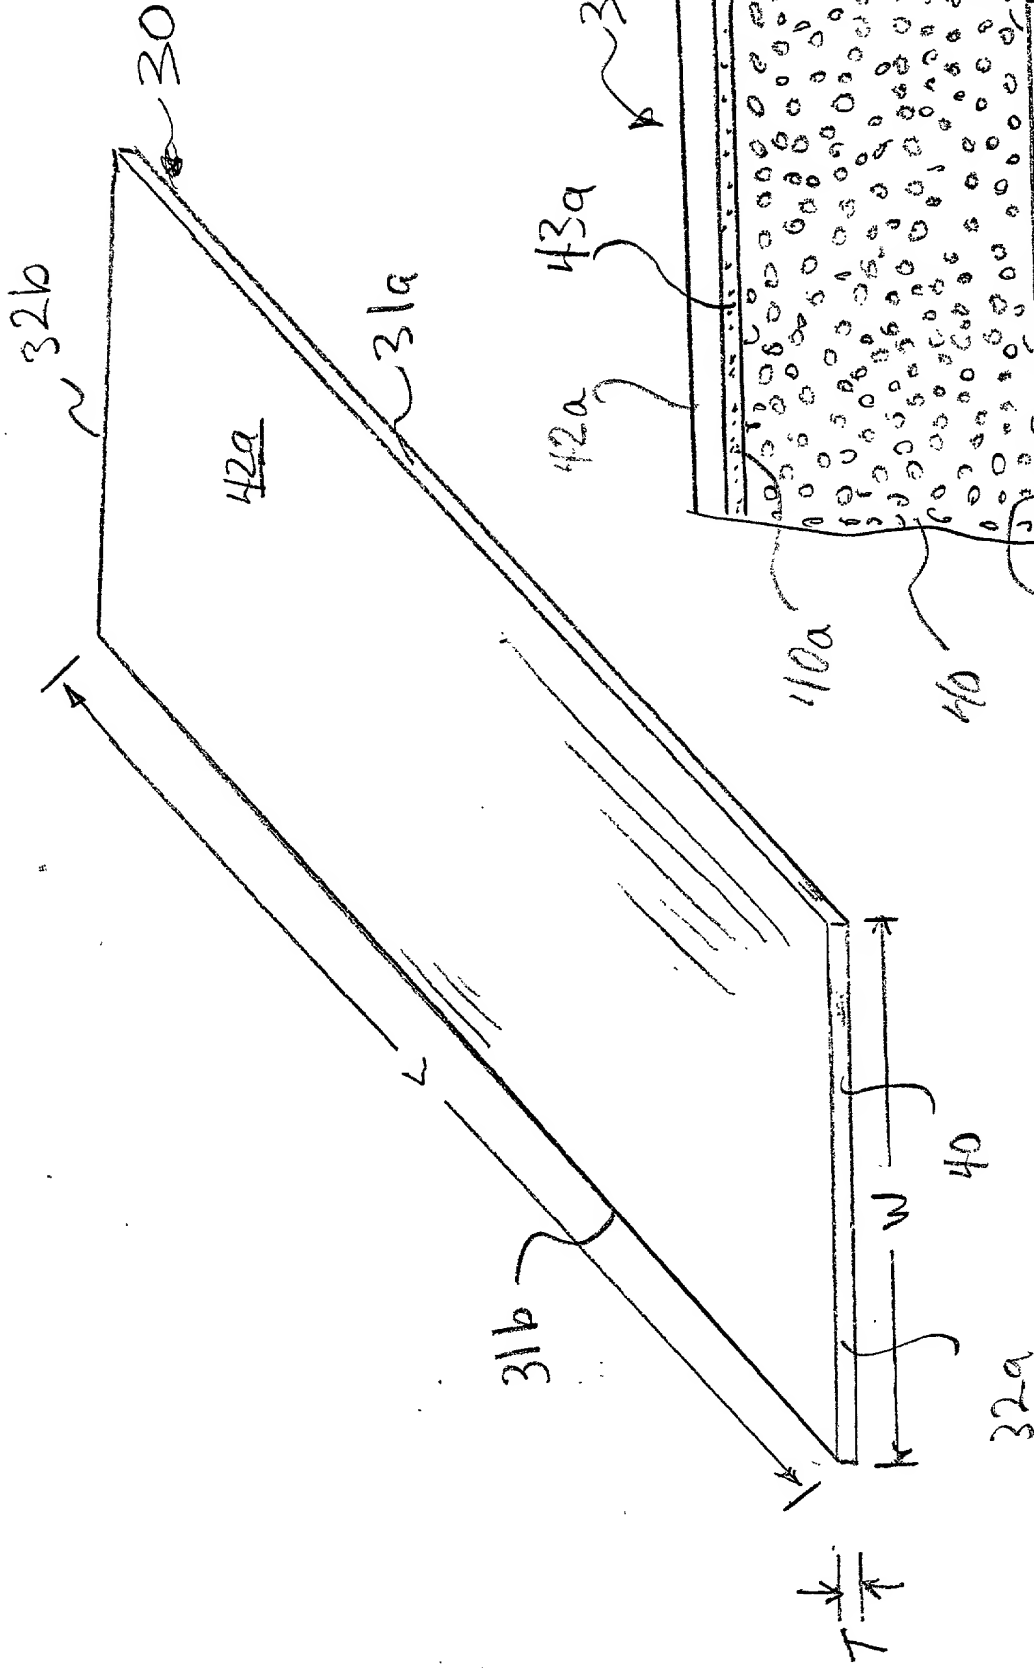


Fig. 1



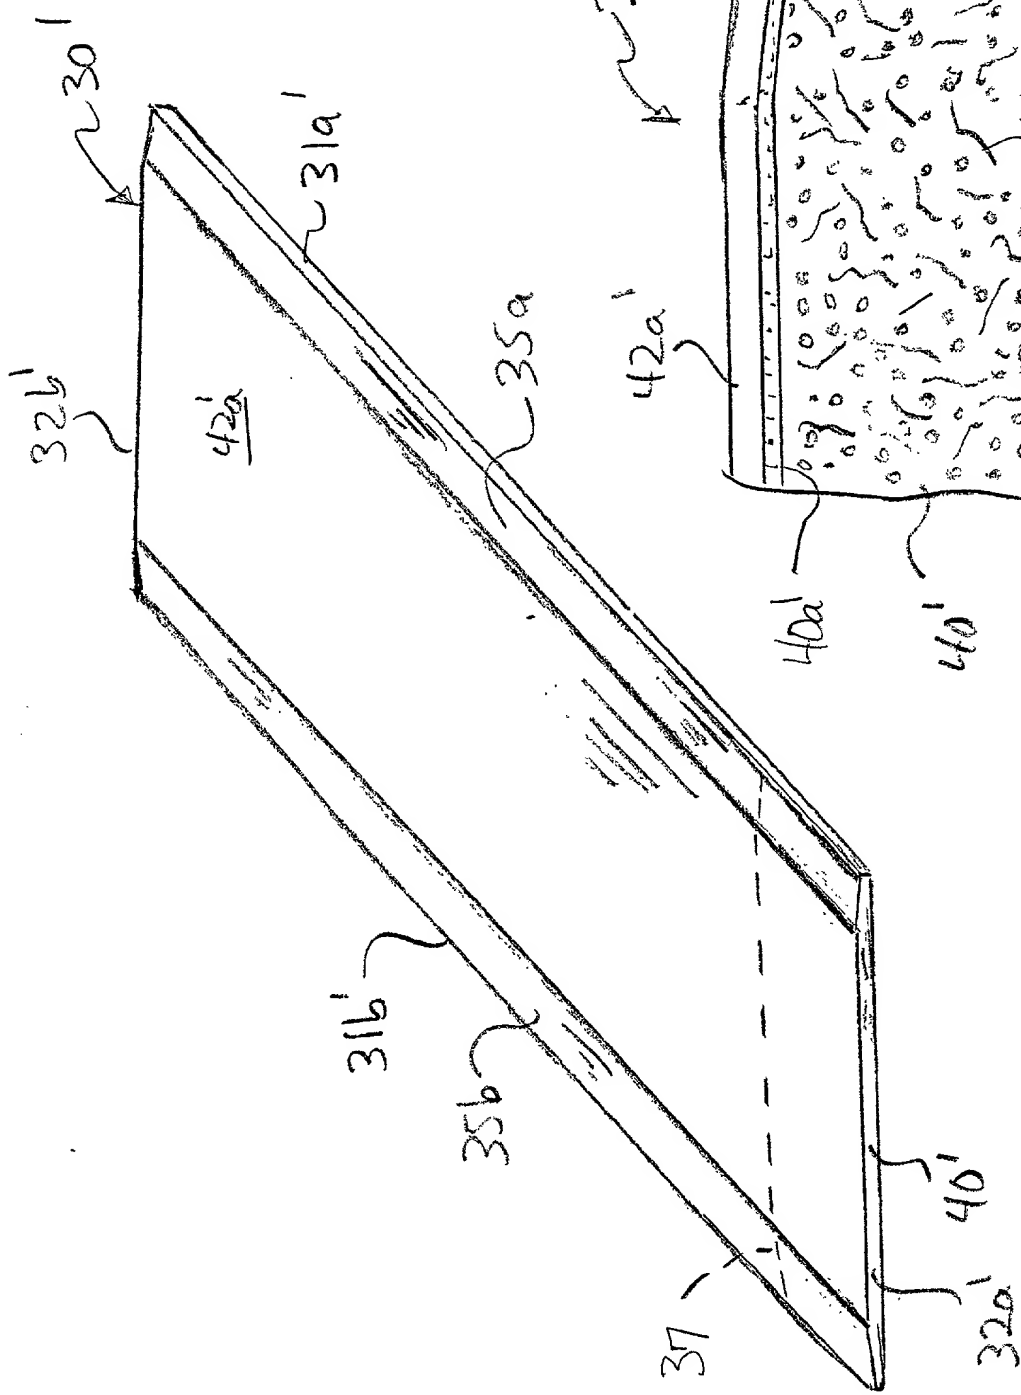


Fig. 4

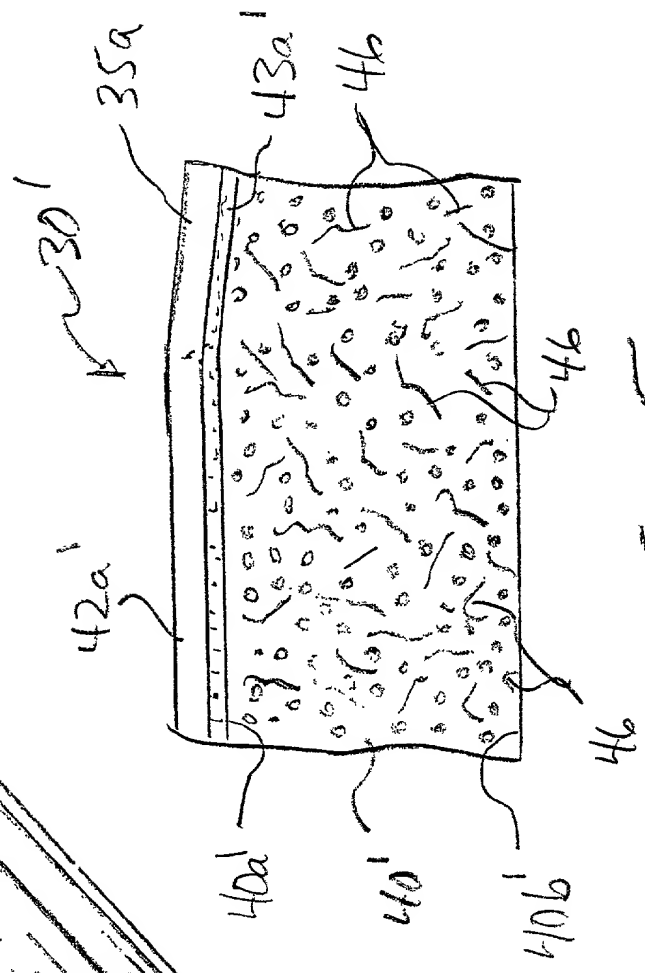
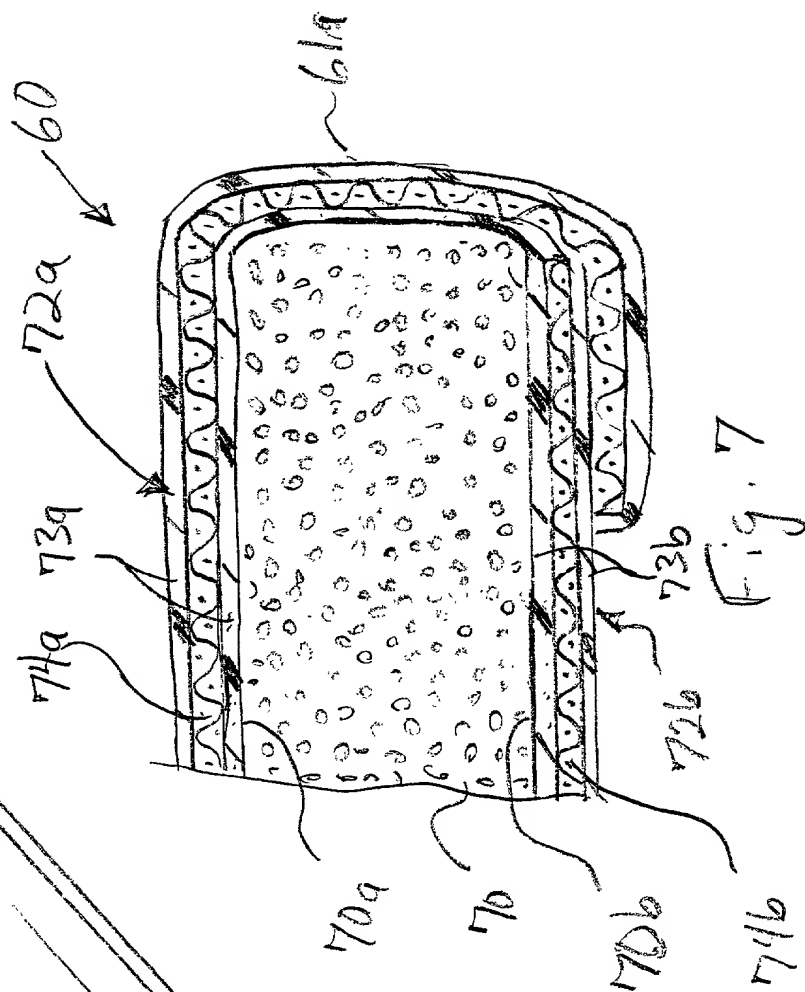
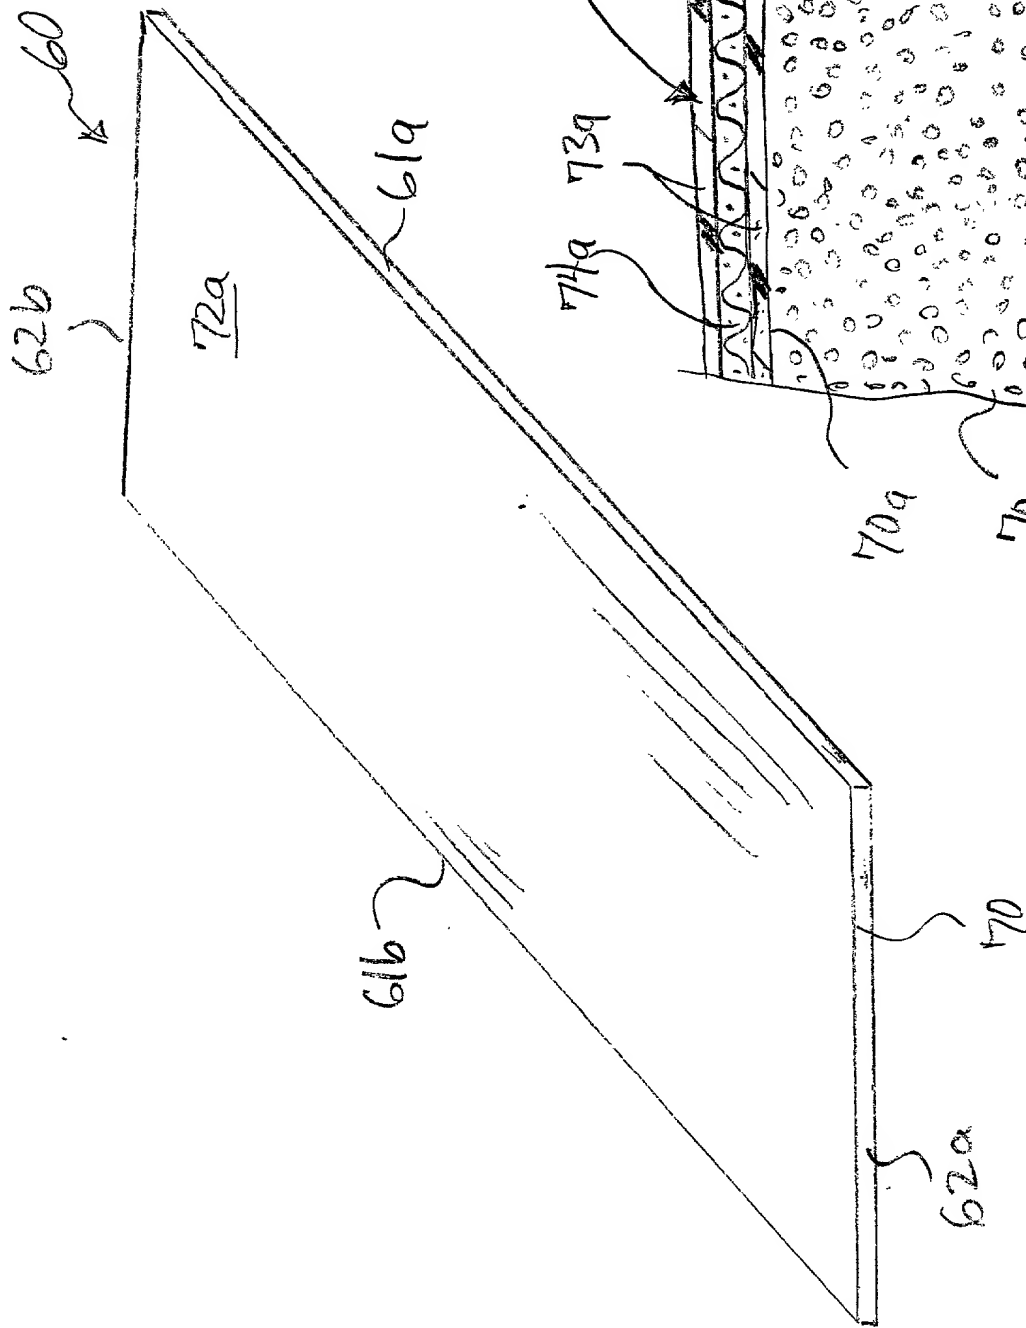


Fig. 5





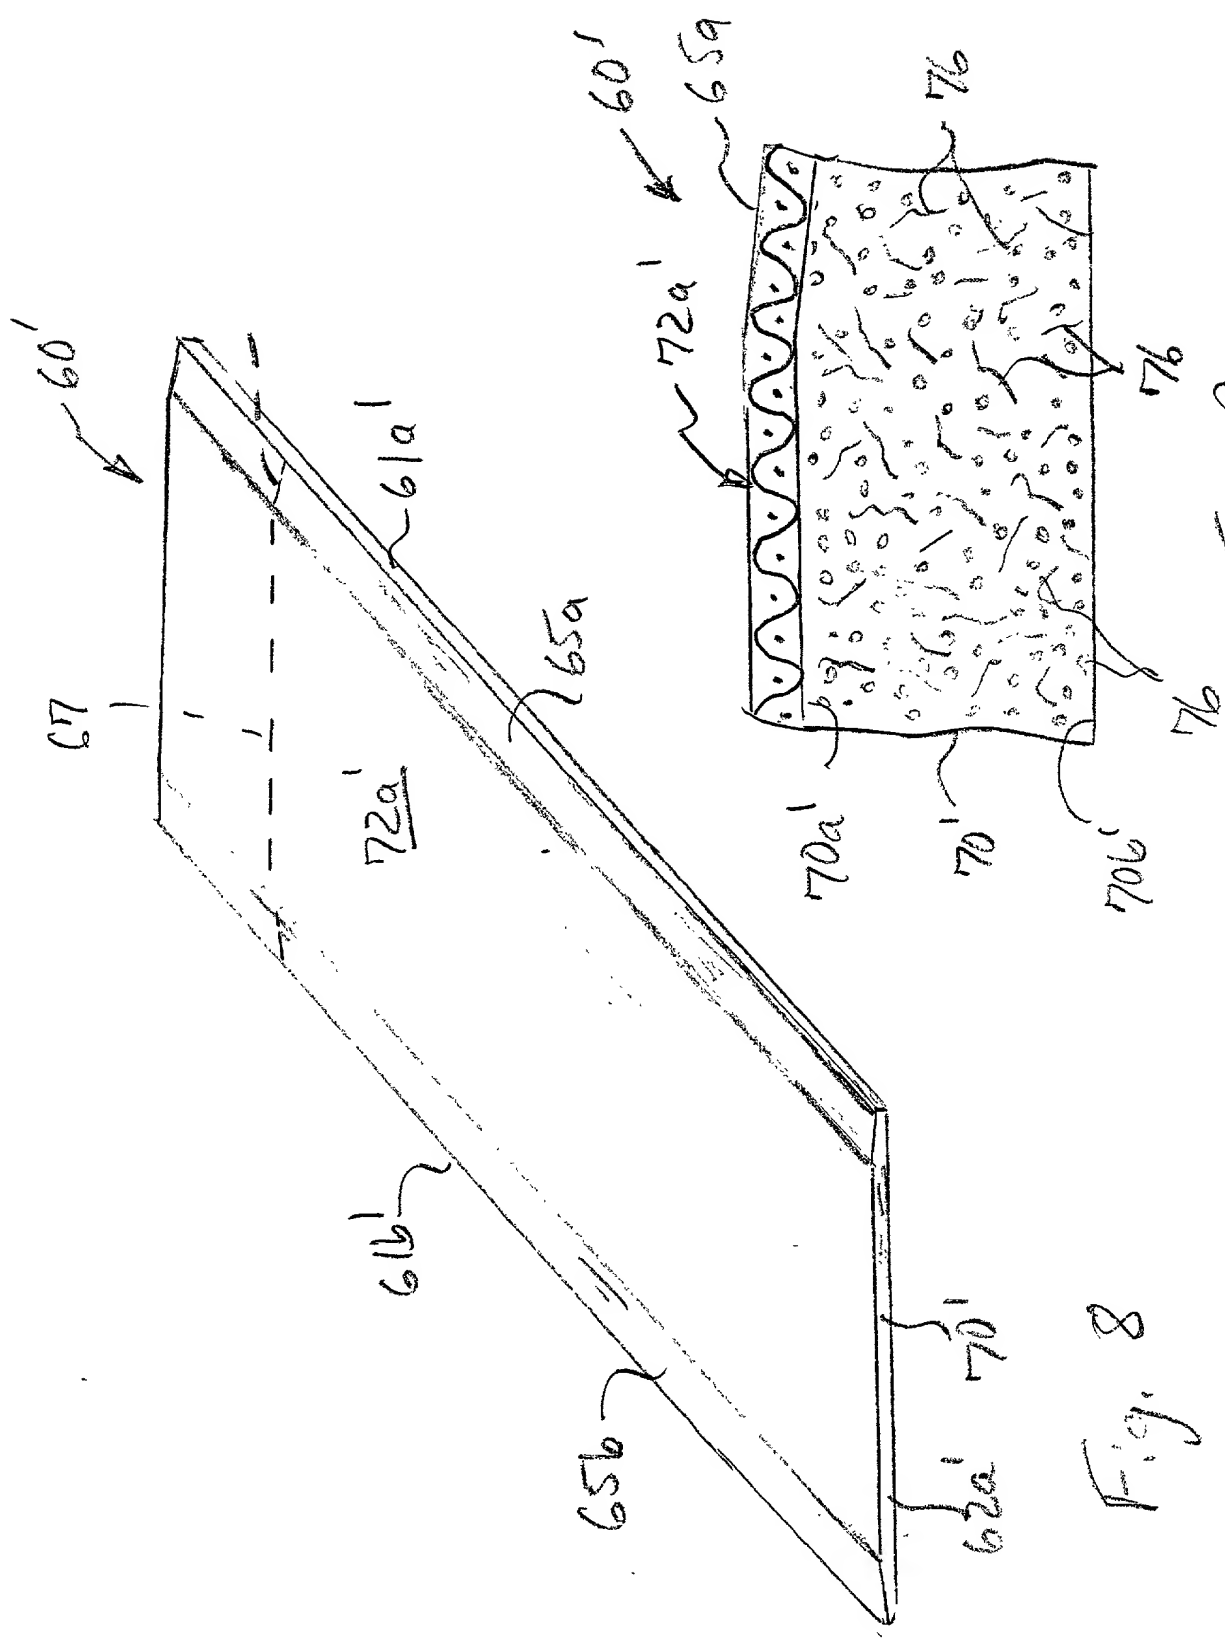


Fig. 8

Fig. 9

009001" T2208960

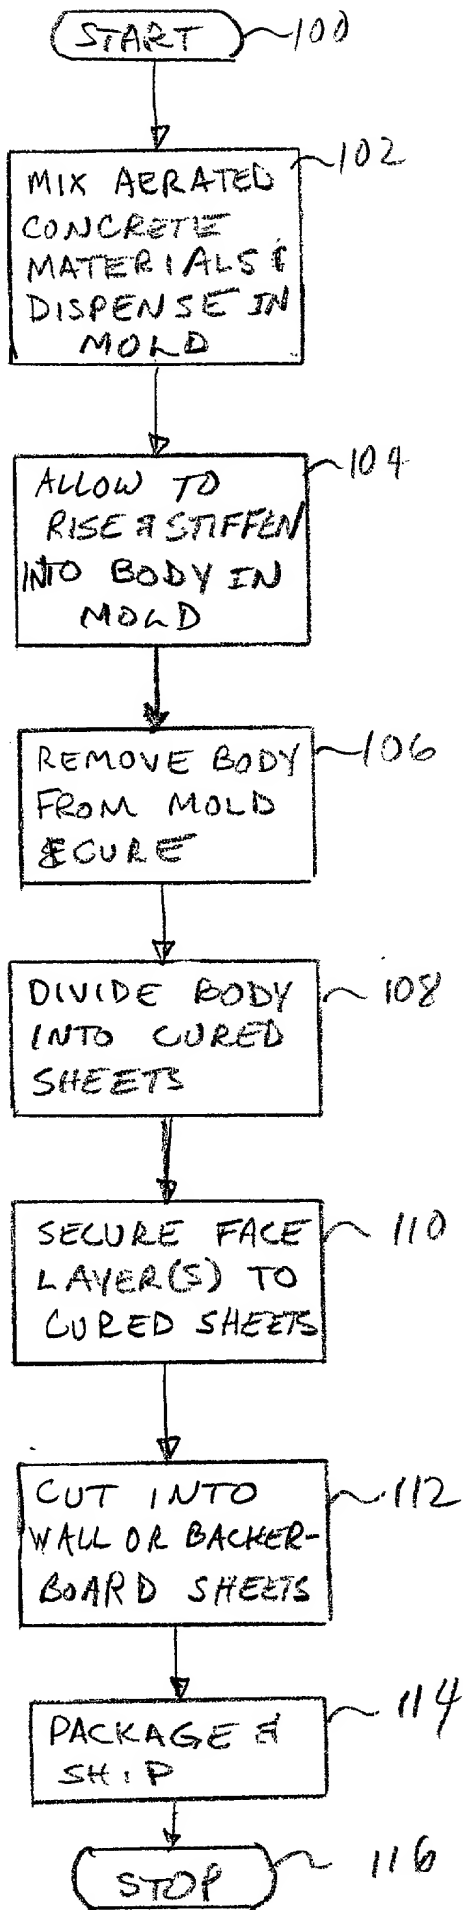


Fig. 10

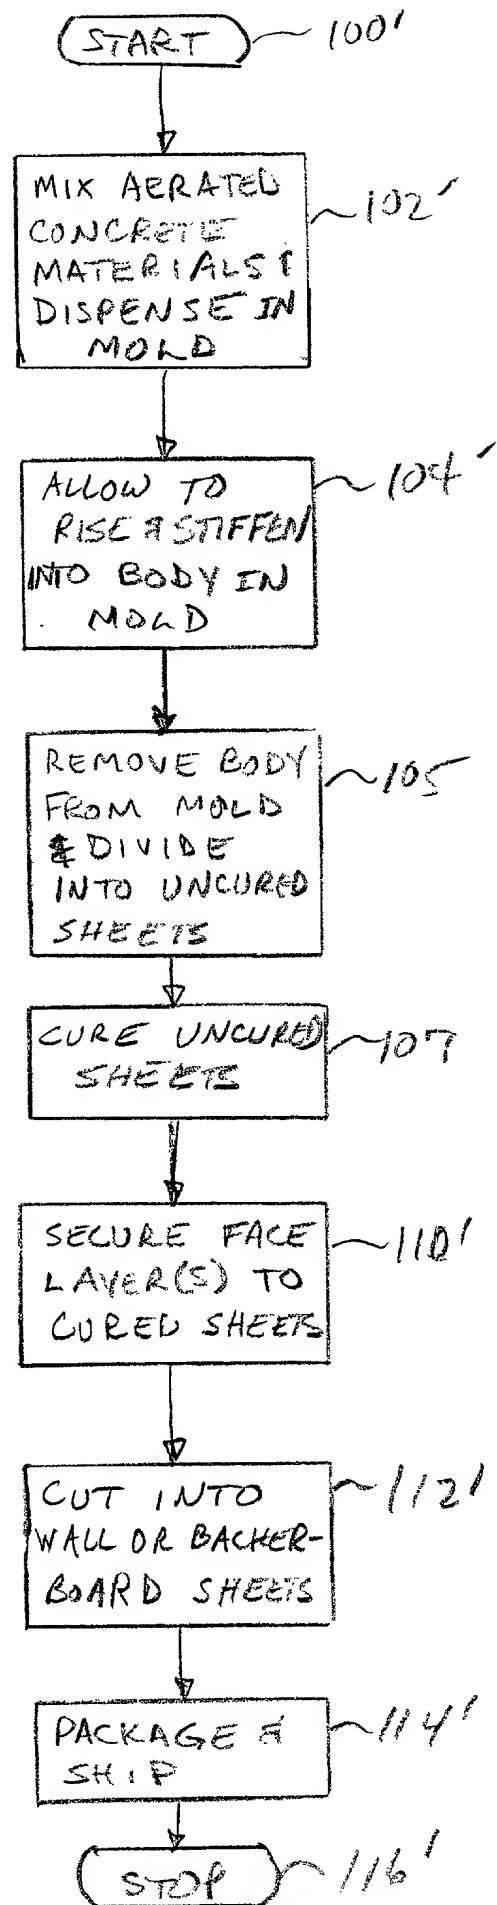
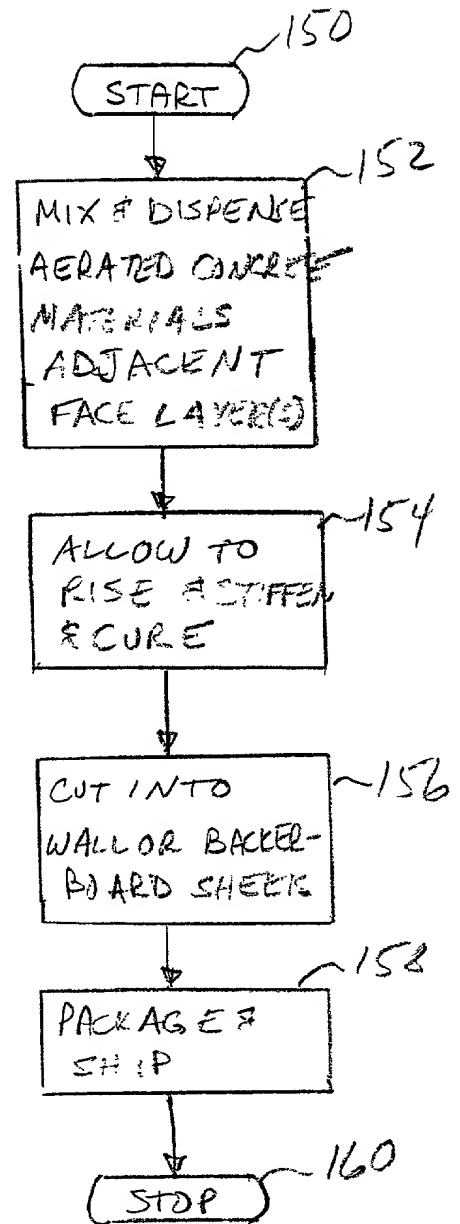
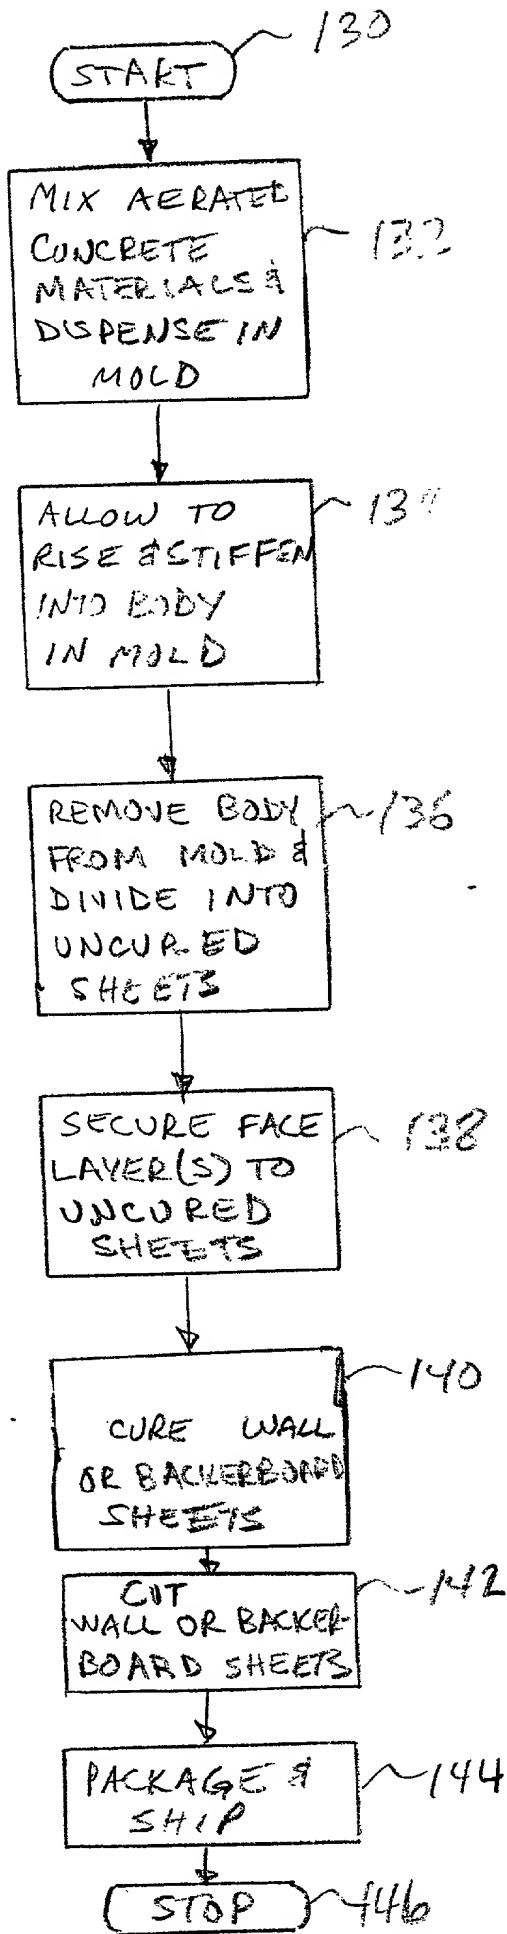


Fig. 11







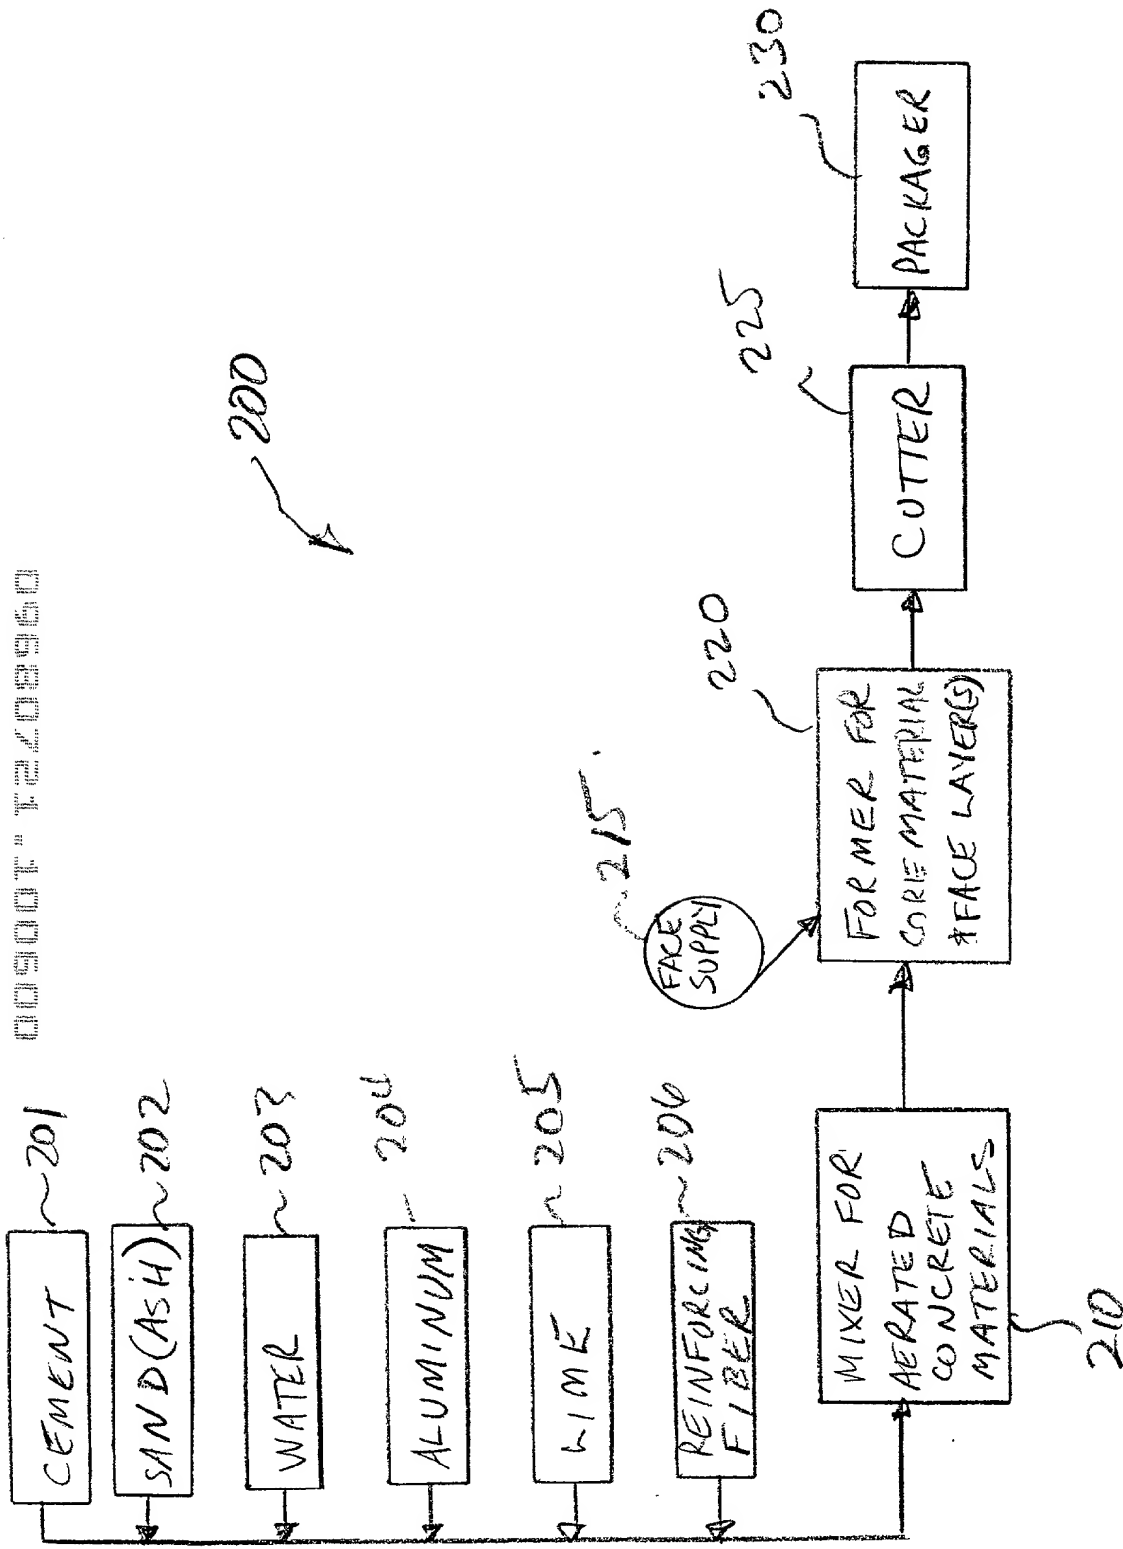


Fig. 14

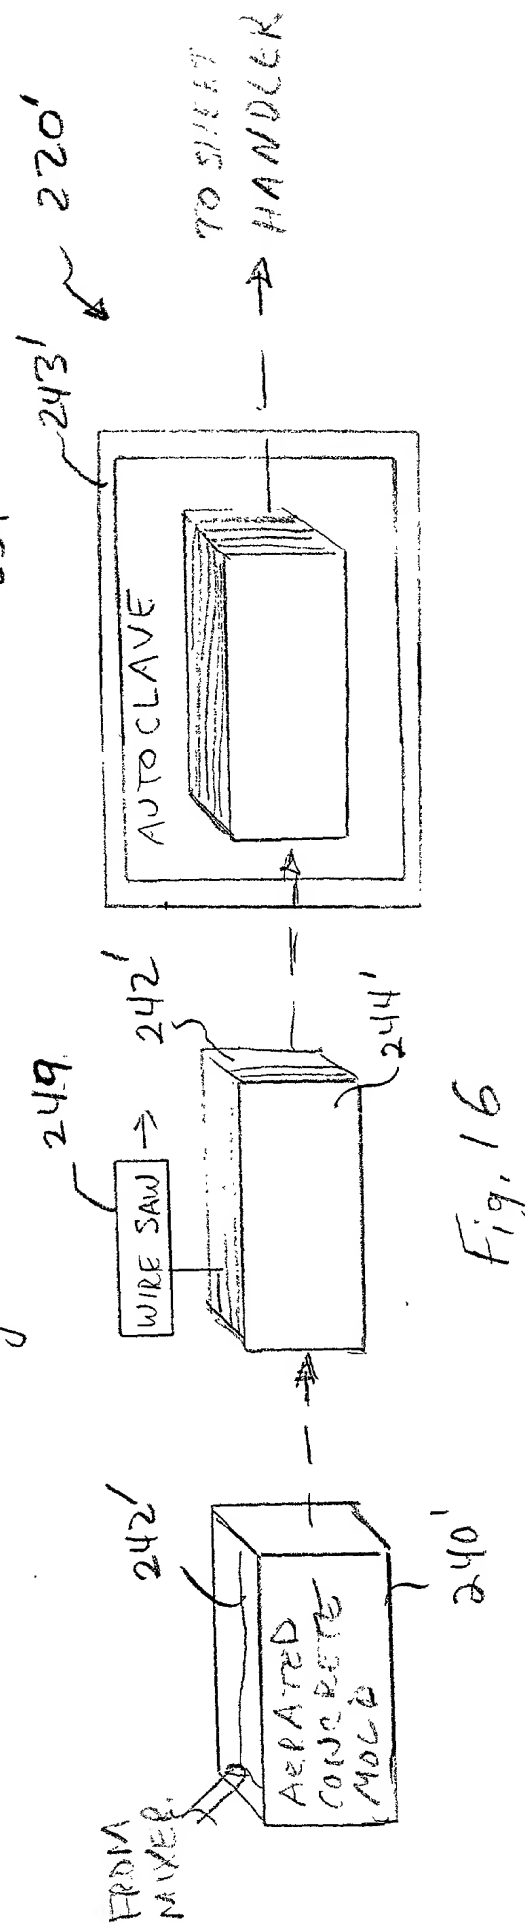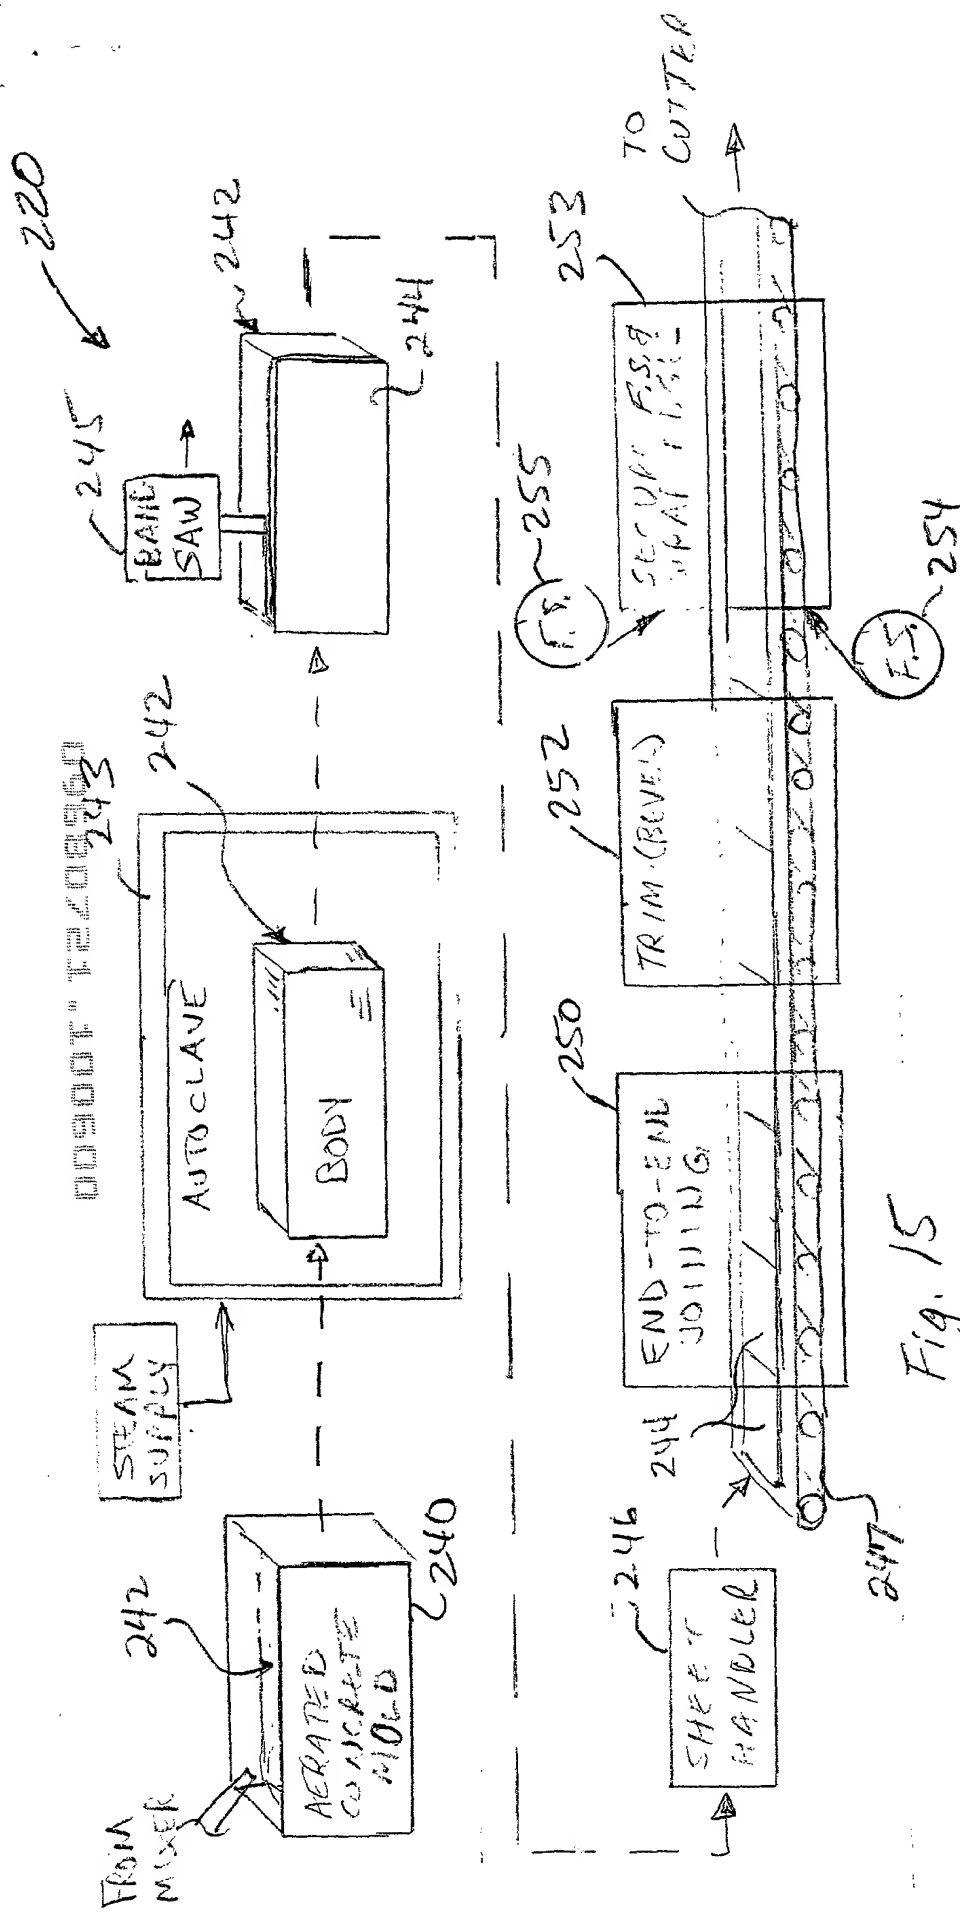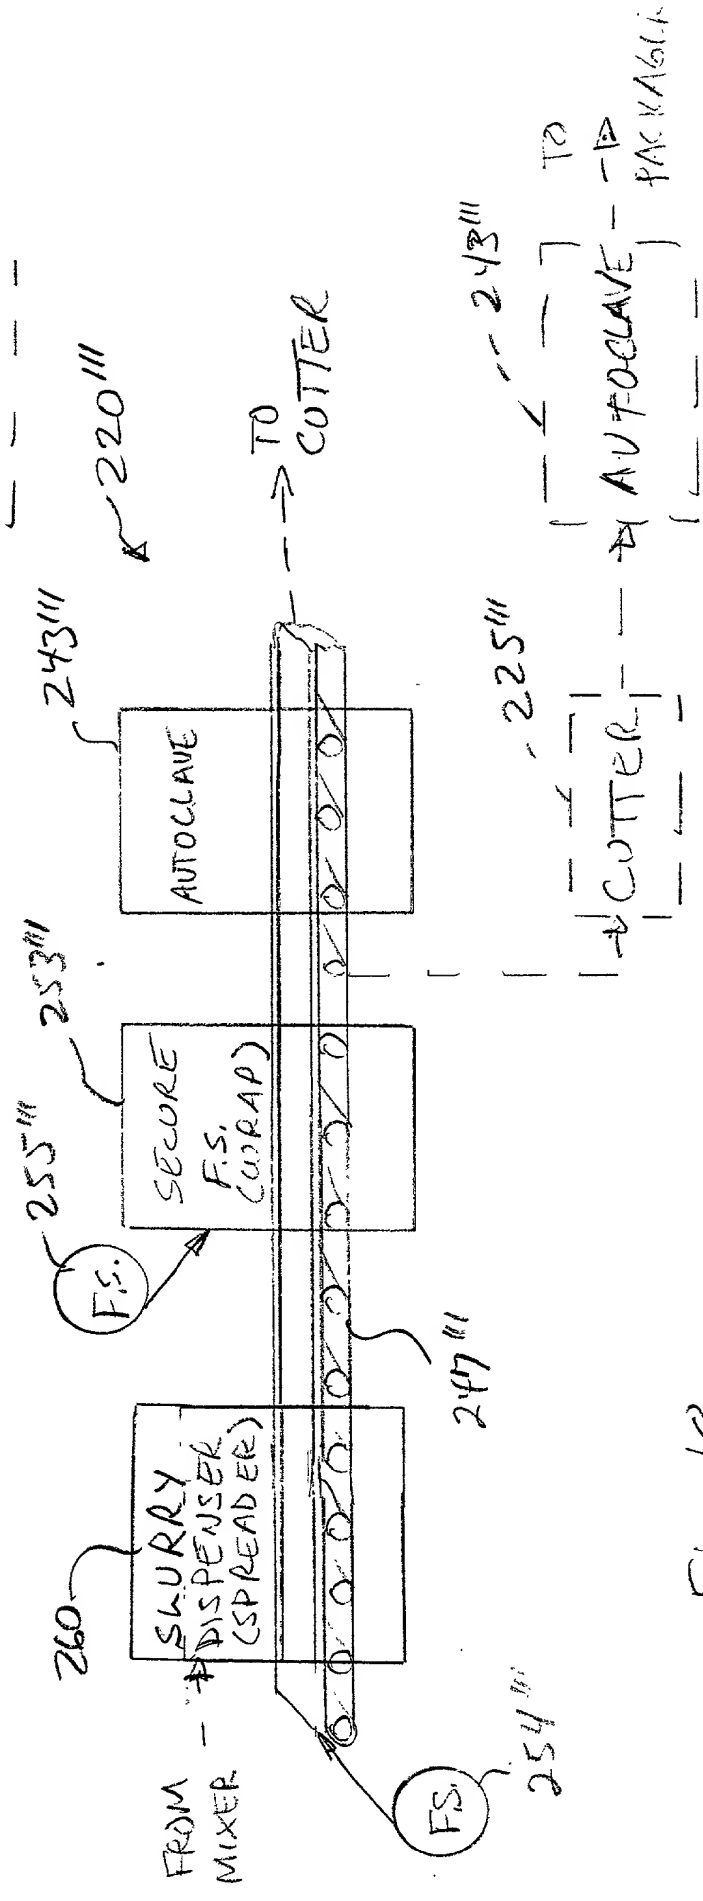

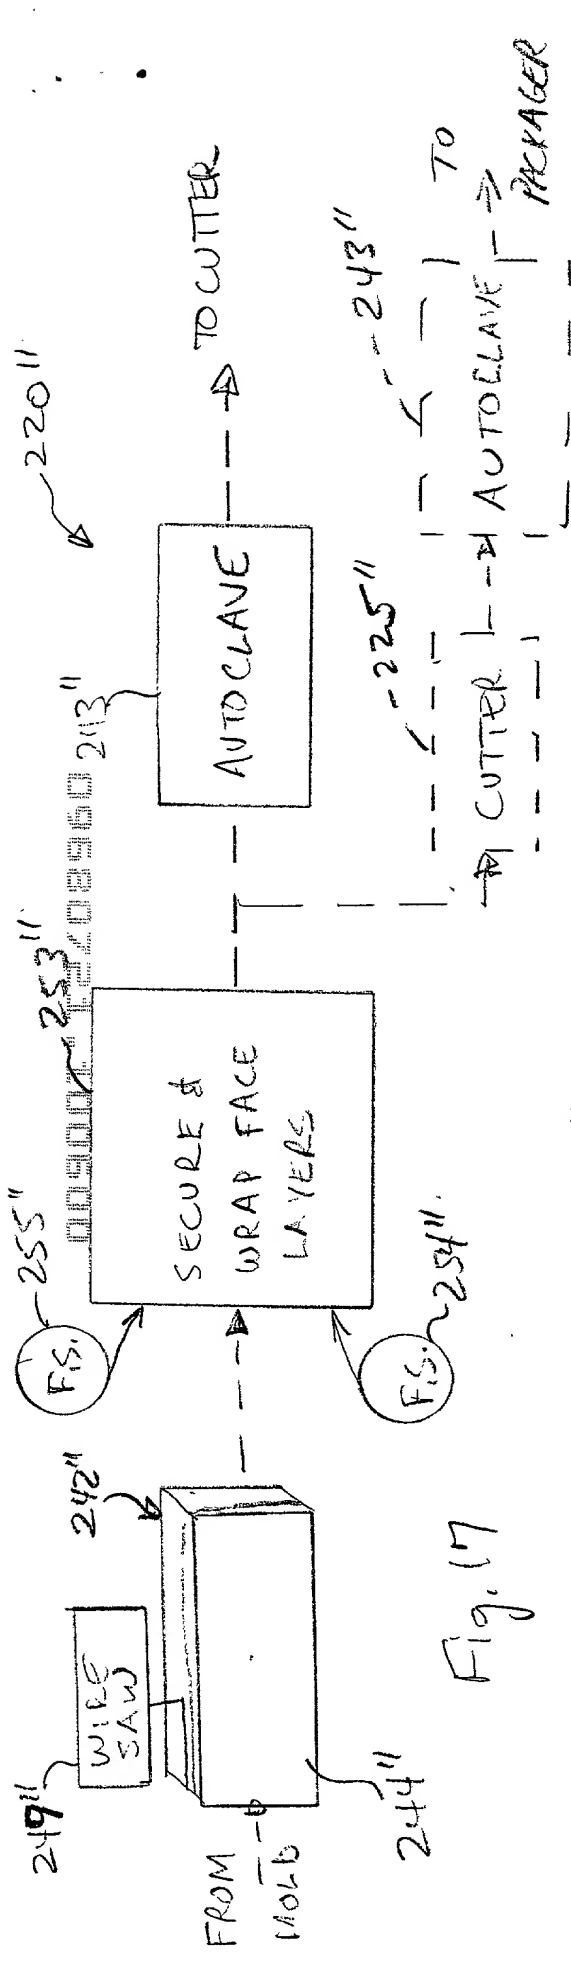

Variable	Mean	Standard Deviation	Minimum	Maximum
Age	34.5	10.2	21	55
Gender	0.5	0.5	0	1
Marital Status	0.3	0.5	0	1
Education	12.5	1.5	10	16
Income	3500	1500	1000	8000
Health	0.8	0.2	0	1
Smoking	0.2	0.4	0	1
Alcohol	0.1	0.3	0	1
Exercise	0.4	0.5	0	1
Stress	0.6	0.4	0	1
Sleep	0.7	0.3	0	1
Work	0.5	0.5	0	1
Family	0.4	0.5	0	1
Friends	0.3	0.5	0	1
Hobbies	0.2	0.4	0	1
Travel	0.1	0.3	0	1
Volunteering	0.1	0.3	0	1
Religion	0.2	0.4	0	1
Politics	0.1	0.3	0	1
Art	0.1	0.3	0	1
Music	0.2	0.4	0	1
Gardening	0.1	0.3	0	1
Reading	0.3	0.5	0	1
Writing	0.1	0.3	0	1
Cooking	0.2	0.4	0	1
Shopping	0.1	0.3	0	1
Driving	0.2	0.4	0	1
Swimming	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1
Spa	0.1	0.3	0	1
Massage	0.1	0.3	0	1
Acupuncture	0.1	0.3	0	1
Chiropractic	0.1	0.3	0	1
Herbal	0.1	0.3	0	1
Meditation	0.1	0.3	0	1
Yoga	0.1	0.3	0	1

- 7 -



I hereby claim the benefit under Title 35, United States Code, 120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Appln Serial No.)	(Filing Date)	(Status)
(Appln Serial No.)	(Filing Date)	(Status)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

#### English Language Declaration

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: **Christopher F. Regan**, Reg. No. 34,906; **Herbert L. Allen**, Reg. No. 25,322; **Jeffrey S. Whittle**, Reg. No. 36,382; **David L. Sigalow**, Reg. No. 36,006; **Richard K. Warther**, Reg. No. 32,180; **Michael W. Taylor**, Reg. No. 43,182; **Paul J. Ditmyer**, Reg. No. 40,455; **Henry Estevez**, Reg. No. 37,823; **John F. Woodson, II**, Reg. No. 45,236; **Charles E. Wands**, Reg. No. 25,649; **Carl M. Napolitano**, Reg. No. 37,405; **Jacqueline E. Hartt**, Reg. No. 37,845; and **Mark R. Malek**, Reg. No. P-46,894, all of Allen, Dyer, Doppelt, Milbrath & Gilchrist, P.A., P.O. Box 3791, Orlando, FL 32802-3791.

OCT -06' 00 (FRI) 14:06

F. BROWNEGREGG

TEL: 13527879527

P. 006

OCT 6 2000 11:18AM

NO. 413 P. 10

Send Correspondence to:

CHRISTOPHER F. REGAN, ESQUIRE  
ALLEN, DYER, DOPPELT, MILBRATH & GILCHRIST, P.A.  
P.O. Box 3791  
Orlando, Florida 32802-3791

Direct Telephone Calls to:

Christopher F. Regan  
(407) 841-2330

Full name of (first) inventor: Frederick Browne GREGG

Inventor's

Signature: *F. Browne Gregg*

Date: \_\_\_\_\_

Residence: Leesburg, Florida

Citizenship: Citizen of United States

Post Office Address: P.O. Box 490300  
Leesburg, Florida 34749

Full name of (second) inventor: Leslie G. BROWNE

Inventor's

Signature: *Leslie G. Browne*

Date: \_\_\_\_\_

Residence: Auburndale, Florida

Citizenship: Citizen of United States

Post Office Address: 530 Hillside Drive  
Auburndale, Florida 33823